MULTIPLE COULOMB SCATTERING AND EMITTANCE GROWTH IN STRIPPER FOILS

a) Tandem Exit
b) Booster Exit

Glenn Young

February 23, 1984

Brookhaven National Laboratory

is small.

Rewriting the equation for $\langle \Theta'^2 \rangle$, we have

$$\sqrt{\langle \Theta'^2 \rangle} \equiv \Theta_{plane}^{rms} = \sqrt{2\pi \frac{\rho N_A}{A} t z_1^2 \ln(210 z^{-1/3})} \quad \frac{2 z_1}{p} \frac{e^2}{\hbar c} \frac{\hbar c}{\beta c}$$

$(\beta = v/c)$

We can approximate $\dfrac{X_0^{-1}}{4\alpha r_0^2 N_A} \sim \dfrac{Z^2 \ln(210 z^{-1/3})}{A}$

and err by only 10% or less for our stripping foils, except for carbon where the neglect of the second coulomb log gives ~16% error for $(\Theta_{plane}^{rms})^2$. This gives a convenient formula in terms of X_0, which is tabulated; the correction is included by multiplying by $(1+\delta)$ where δ is evaluated for each material. For carbon, $\delta = -0.079$

copper, $\delta = 0.00193$

tantalum, $\delta = 0.0478$

This then works out to

$$\boxed{\Theta_{plane}^{rms} = (1+\delta) z_1 \frac{14.98 \text{ MeV/c}}{p\beta} \sqrt{\frac{\Delta}{X_0}}}$$

where Δ is the scatterer thickness in g/cm^2 and X_0 is in g/cm^2. X_0 is tabulated in Tsai's article; or see the Particle Data Properties booklet. $X_0 = 42.70$ g/cm^2 carbon; 6.82 g/cm^2 tantalum

12.86 g/cm^2 copper

2/23/84

In the following graphs, values of θ_{plane}^{rms} are given for C, S, Cu, I and Au ions for the following cases.

(a) Tandem exit — energy/nucleon expected for 2 stage operation
5 - 20 $\mu g/cm^2$ carbon stripper

(b) booster exit — 300 - 500 MeV/nucleon ie matching to performance expected for gold
10 - 100 mg/cm^2 copper stripper

Emittance growth can be found from

$$\varepsilon = \beta(\theta_0^2 + \theta_{plane}^{rms\ 2}) \quad , \text{ where } \varepsilon = \beta\theta_0^2 \text{ is the}$$

emittance prior to passing through the stripper. The last graphs then give values of the β function required to limit the emittance growth at the tandem exit to 0.5 π mm mrad, and at the booster exit to 1.0 π mm mrad. Carbon is fully stripped after the tandem exit stripper. The curves for ^{32}S and ^{63}Cu at the booster exit are included for completeness only. The stripper thicknesses listed are overkill by at least a factor of 100 or more.

As usual, gold yields the most stringent requirements. At the tandem exit, 20 $\mu g/cm^2$ carbon @ 1 MeV/A requires $\beta^* = 14$ cm. At the booster exit, 367 MeV/A thru a 70 mg/cm^2 Copper stripper requires $\beta^* = 2.02$ m. This line can handle all lighter beams, as they use thinner stripping foils.

3/1/84

NOTE ADDED

Another formula for multiple scattering of heavy ions is given by Green (U. Washington, Seattle, Annual Report 1975). It gives somewhat more optimistic numbers than the one from Jackson.

The formula is

$$\theta_{1/2} = K\, Z\, \frac{Z_1 Z_2}{E_1}\, T^n \qquad \text{(Divide by 1.175 to get } \sigma^{rms}_{plane}\text{)}$$

where $K = 1.92\ 10^{-2}$ mrad, Z_1 = Z of ion, Z_2 = Z of foil, $Z = (Z_1^{2/3} + Z_2^{2/3})^{1/2}$ (this appears from calculating an effective screening radius), E_1 is the total kinetic energy of the ion, and T and n are given by

$$T = \frac{41.5\ \delta}{Z^2\ A} \qquad \delta = \text{foil thickness in } \mu g/cm^2,\ A = \text{foil Atomic weight}$$

and $n = N^{-.115} - .115$ where $N = \ln(1.03 + T)$. Needless to say, this is a phenomenological formula.

PAST EXPERIENCE AT OAK RIDGE IS THAT THIS GIVES TOO SMALL VALUES BY ~ FACTOR OF TWO

To give some values to compare, consider ^{197}Au at the tandem and booster exits, passing thru 20 $\mu g/cm^2$ C and 70 mg/cm^2 Cu strippers, respectively. A comparison of the two formulae results is below.

Tandem	.5 MeV/A	1 MeV/A	1.5 MeV/A	.5 MeV/A	1 MeV/A	1.5 MeV/A
Jackson's	3.782	1.894	1.263	.035	0.14	0.31
Green's	.978	.489	.326	.52	2.09	4.70

Booster	300	350	400	450	300	350	400	450 MeV/A
Jackson's	.844	.733	.654	.590	1.40	1.86	2.34	2.87
Green's	.515	.441	.386	.343	3.77	5.14	6.71	8.50

θ^{rms}_{plane} (mrad) — B^* value needed

4b

3/1/84

CONCLUSION

(1) Some attention has to be paid to the transport between the tandem high energy end and the stripper foil. A quad doublet has to be used to focus x and y to a small spot. β^* values somewhere in the range of 0.14 m (Jackson formula) to 2m (Greene) formula are needed.

A measurement of emittance after the high energy stripper for the heavy beams is needed. We want a growth of less than 0.5π mm mrad so the injection into the booster works.

(2) Stripping at the booster exit will require β^* of 2m or longer, but again in <u>both</u> x and y. Again a quad doublet before the stripper is needed.

(3) Better (smaller) values of scattering angles due to multiple Coulomb scattering could be had by using gold foils. Less thickness is needed to strip to the equilibrium charge state distribution due to the density effect in stripping.

For the tandem exit, this probably does not work as the thickness required (10 $\mu g/cm^2$) is mechanically quite fragile.

For the booster exit, foils of 20–30 mg/cm^2 are needed, which are quite rugged (0.02 mm thick). As the β^* required varies as the thickness (inversely) the β^* needed after the booster could be relaxed by a factor of two in both planes.

θ^{rms}_{plane} Mult Scatt

Tandem Exit Carbon Stripper (5, 10, 20 μg/cm²)

Ion	E/A (MeV/A)	P/A	P	β	θ^{rms}_{plane} (mrad) 5 μg/cm²	10 μg/cm²	20 μg/cm²
^{12}C	6.5	110.2	1322.8	.1175	0.182	0.258	0.364
(Z=6)	7	114.4	1372.9	.1219	0.169	0.239	0.339
	7.5	118.4	1421.3	.1261	0.158	0.224	0.316
	8	122.3	1468.1	.1302	0.148	0.210	0.296
	8.5	126.1	1513.5	.1342	0.139	0.197	0.279
^{32}S	3.5	80.8	2586.4	.0864	0.338	0.478	0.676
(Z=16)	4	86.4	2765.4	.0924	0.296	0.418	0.591
	4.5	91.7	2933.5	.0979	0.263	0.372	0.526
	5	96.6	3092.6	.1032	0.237	0.335	0.473
	5.5	101.4	3244.0	.1082	0.215	0.304	0.430
^{63}Cu	2	61.1	3847.6	.0654	0.544	0.769	1.088
(Z=29)	2.5	68.3	4302.4	.0731	0.435	0.616	0.871
	3	74.8	4713.6	.0804	0.363	0.513	0.725
	3.5	80.8	5092.0	.0864	0.311	0.440	0.622
	4	86.4	5444.3	.0924	0.272	0.385	0.544
^{127}I	.5	30.5	3876.6	.0328	1.968	2.783	3.936
(Z=53)	1	43.2	5483.1	.0463	0.986	1.394	1.971
	1.5	52.9	6716.3	.0567	0.657	0.929	1.314
	2	61.1	7756.4	.0654	0.493	0.698	0.986
^{197}Au	.5	30.5	6013.3	.0328	1.891	2.674	3.782
(Z=79)	1	43.2	8505.3	.0463	0.947	1.339	1.894
	1.5	52.9	10418.2	.0567	0.631	0.893	1.263

θ^{rms}_{plane} Mult Scatt

Booster Exit Copper Strippers (10, 40, 70, 100 mg/cm²)

Ion	E/A	p/A (MeV/c A)	p (GeV/c)	β	θ^{rms}_{plane} (mrad) 10 mg/cm²	40 mg/cm²	70 mg/cm²	100 mg/cm²
^{32}S	300	805.5	25.78	0.6541	0.397	0.794	1.051	1.255
Z=16	350	880.1	28.2	0.6868	0.346	0.692	0.915	1.094
	400	951.4	30.44	0.7145	0.308	0.616	0.815	0.974
	450	1020.2	32.65	0.7385	0.278	0.554	0.736	0.879
	500	1086.97	34.78	0.7593	0.254	0.508	0.672	0.803
^{63}Cu	300	805.5	50.75	0.6541	0.366	0.732	0.968	1.157
Z=29	350	880.1	55.4	0.6868	0.318	0.636	0.841	1.006
	400	951.4	59.94	0.7145	0.283	0.566	0.749	0.895
	450	1020.2	64.27	0.7385	0.256	0.502	0.677	0.810
	500	1087.0	68.48	0.7593	0.233	0.466	0.616	0.737
^{127}I	300	805.5	102.3	0.6541	0.331	0.662	0.876	1.047
Z=53	350	880.1	111.8	0.6868	0.289	0.578	0.765	0.914
	400	951.4	120.8	0.7145	0.257	0.514	0.680	0.813
	450	1020.2	129.6	0.7385	0.232	0.464	0.614	0.734
	500	1087.0	138.0	0.7593	0.212	0.424	0.561	0.670
^{197}Au	300	805.5	158.7	0.6541	0.319	0.638	0.844	1.009
Z=79	350	880.1	173.4	0.6868	0.277	0.554	0.733	0.876
	400	951.4	187.4	0.7145	0.247	0.494	0.654	0.781
	450	1020.2	200.9	0.7385	0.223	0.446	0.590	0.705
	500	1087.0	214.1	0.7593	0.203	0.406	0.537	0.642

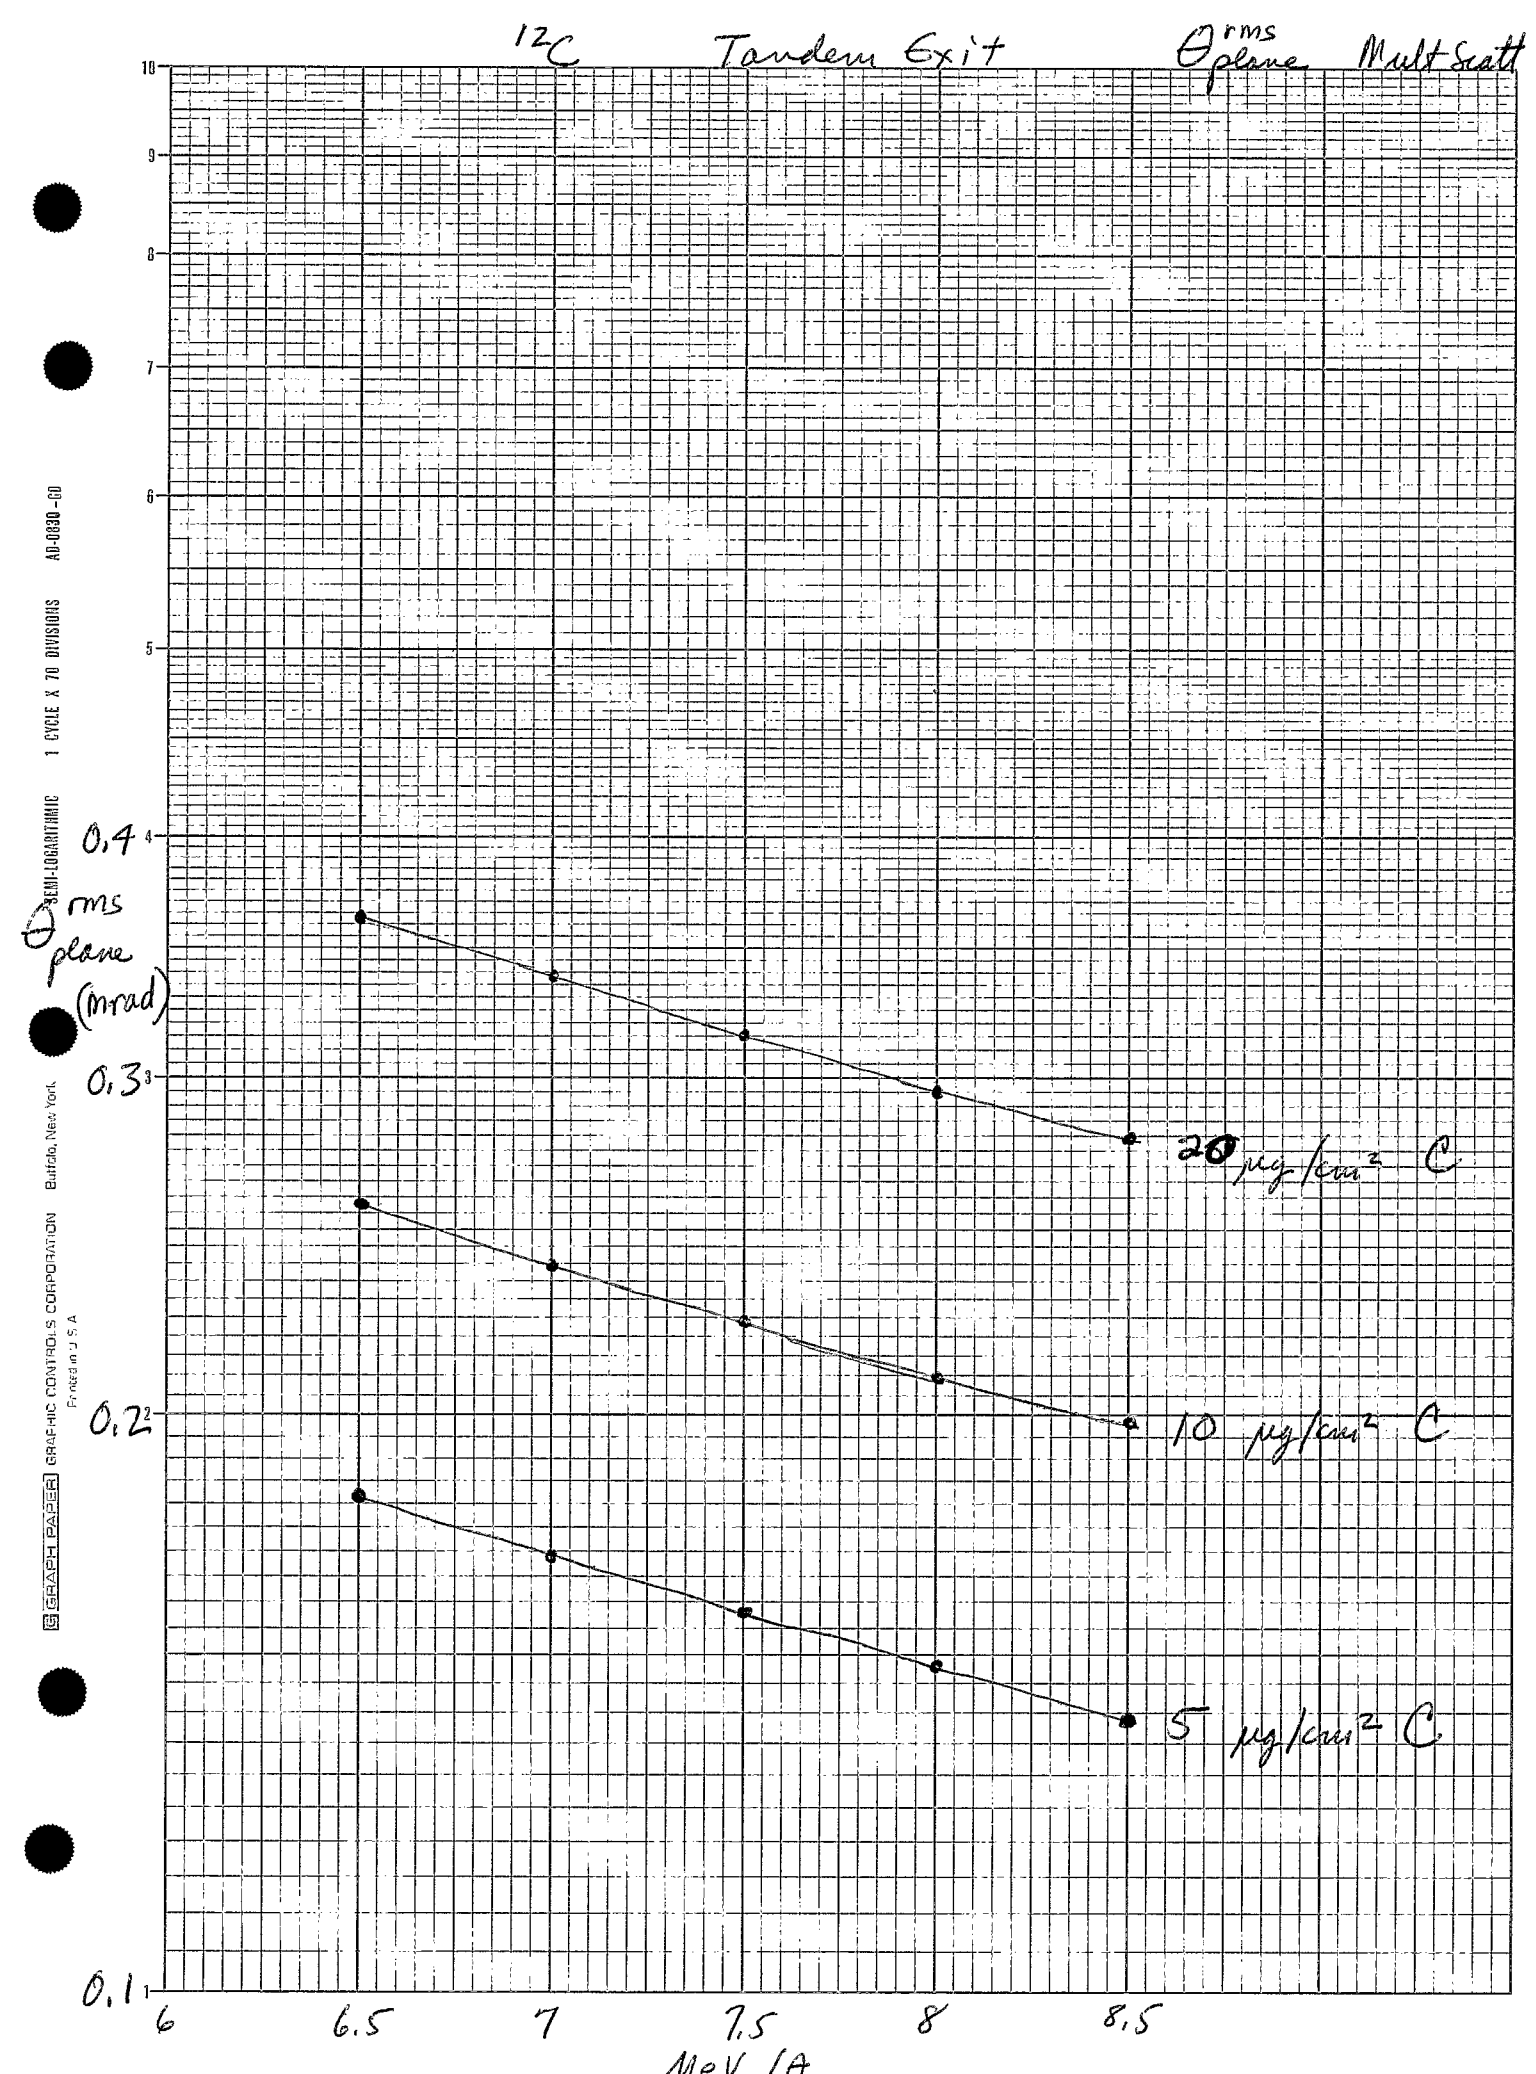
12C Tandem Exit θ rms plane Mult Scatt
θ rms plane (mrad)
0.4
0.3
0.2
0.1
6
6.5
7
7.5
8
8.5
MeV/A
20 μg/cm² C
10 μg/cm² C
5 μg/cm² C
SEMI-LOGARITHMIC 1 CYCLE X 70 DIVISIONS AD-0830-60
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

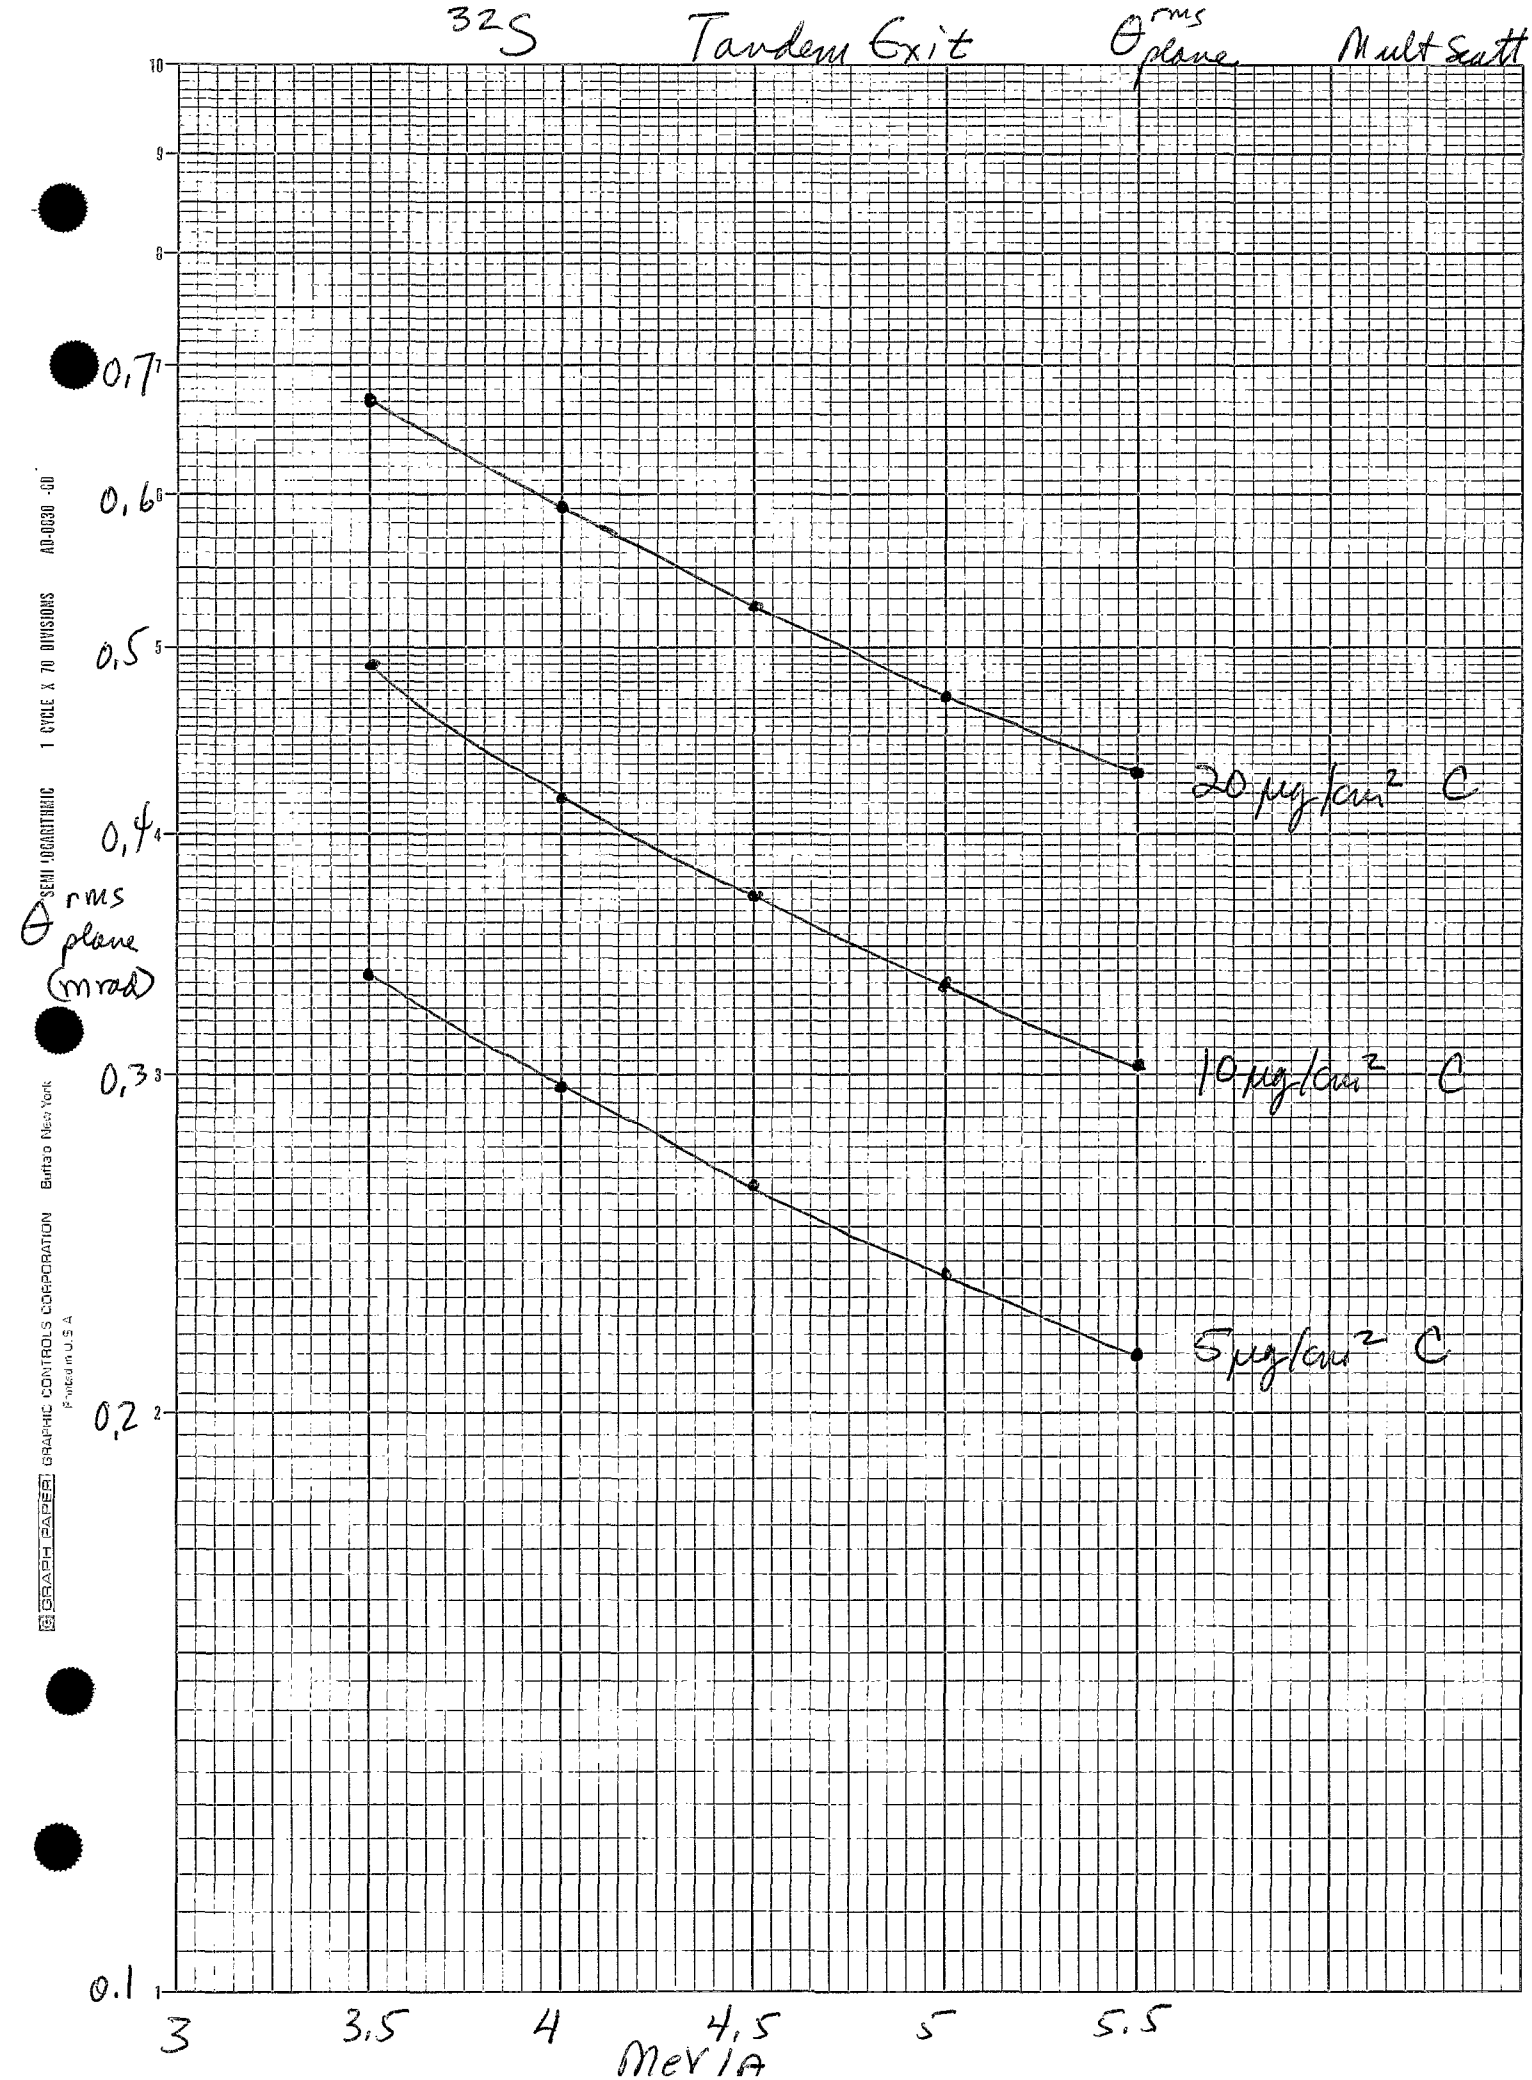
32S Tandem Exit θ_{plane}^{rms} Mult Scatt
0,7
0,6
0,5
0,4
0,3
0,2
0.1
θ_{plane}^{rms} (mrad)
20 μg/cm² C
10 μg/cm² C
5 μg/cm² C
3
3,5
4
4,5
5
5,5
MeV/A
SEMI-LOGARITHMIC 1 CYCLE X 70 DIVISIONS A0-0030 -60
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo New York
Printed in U.S.A.

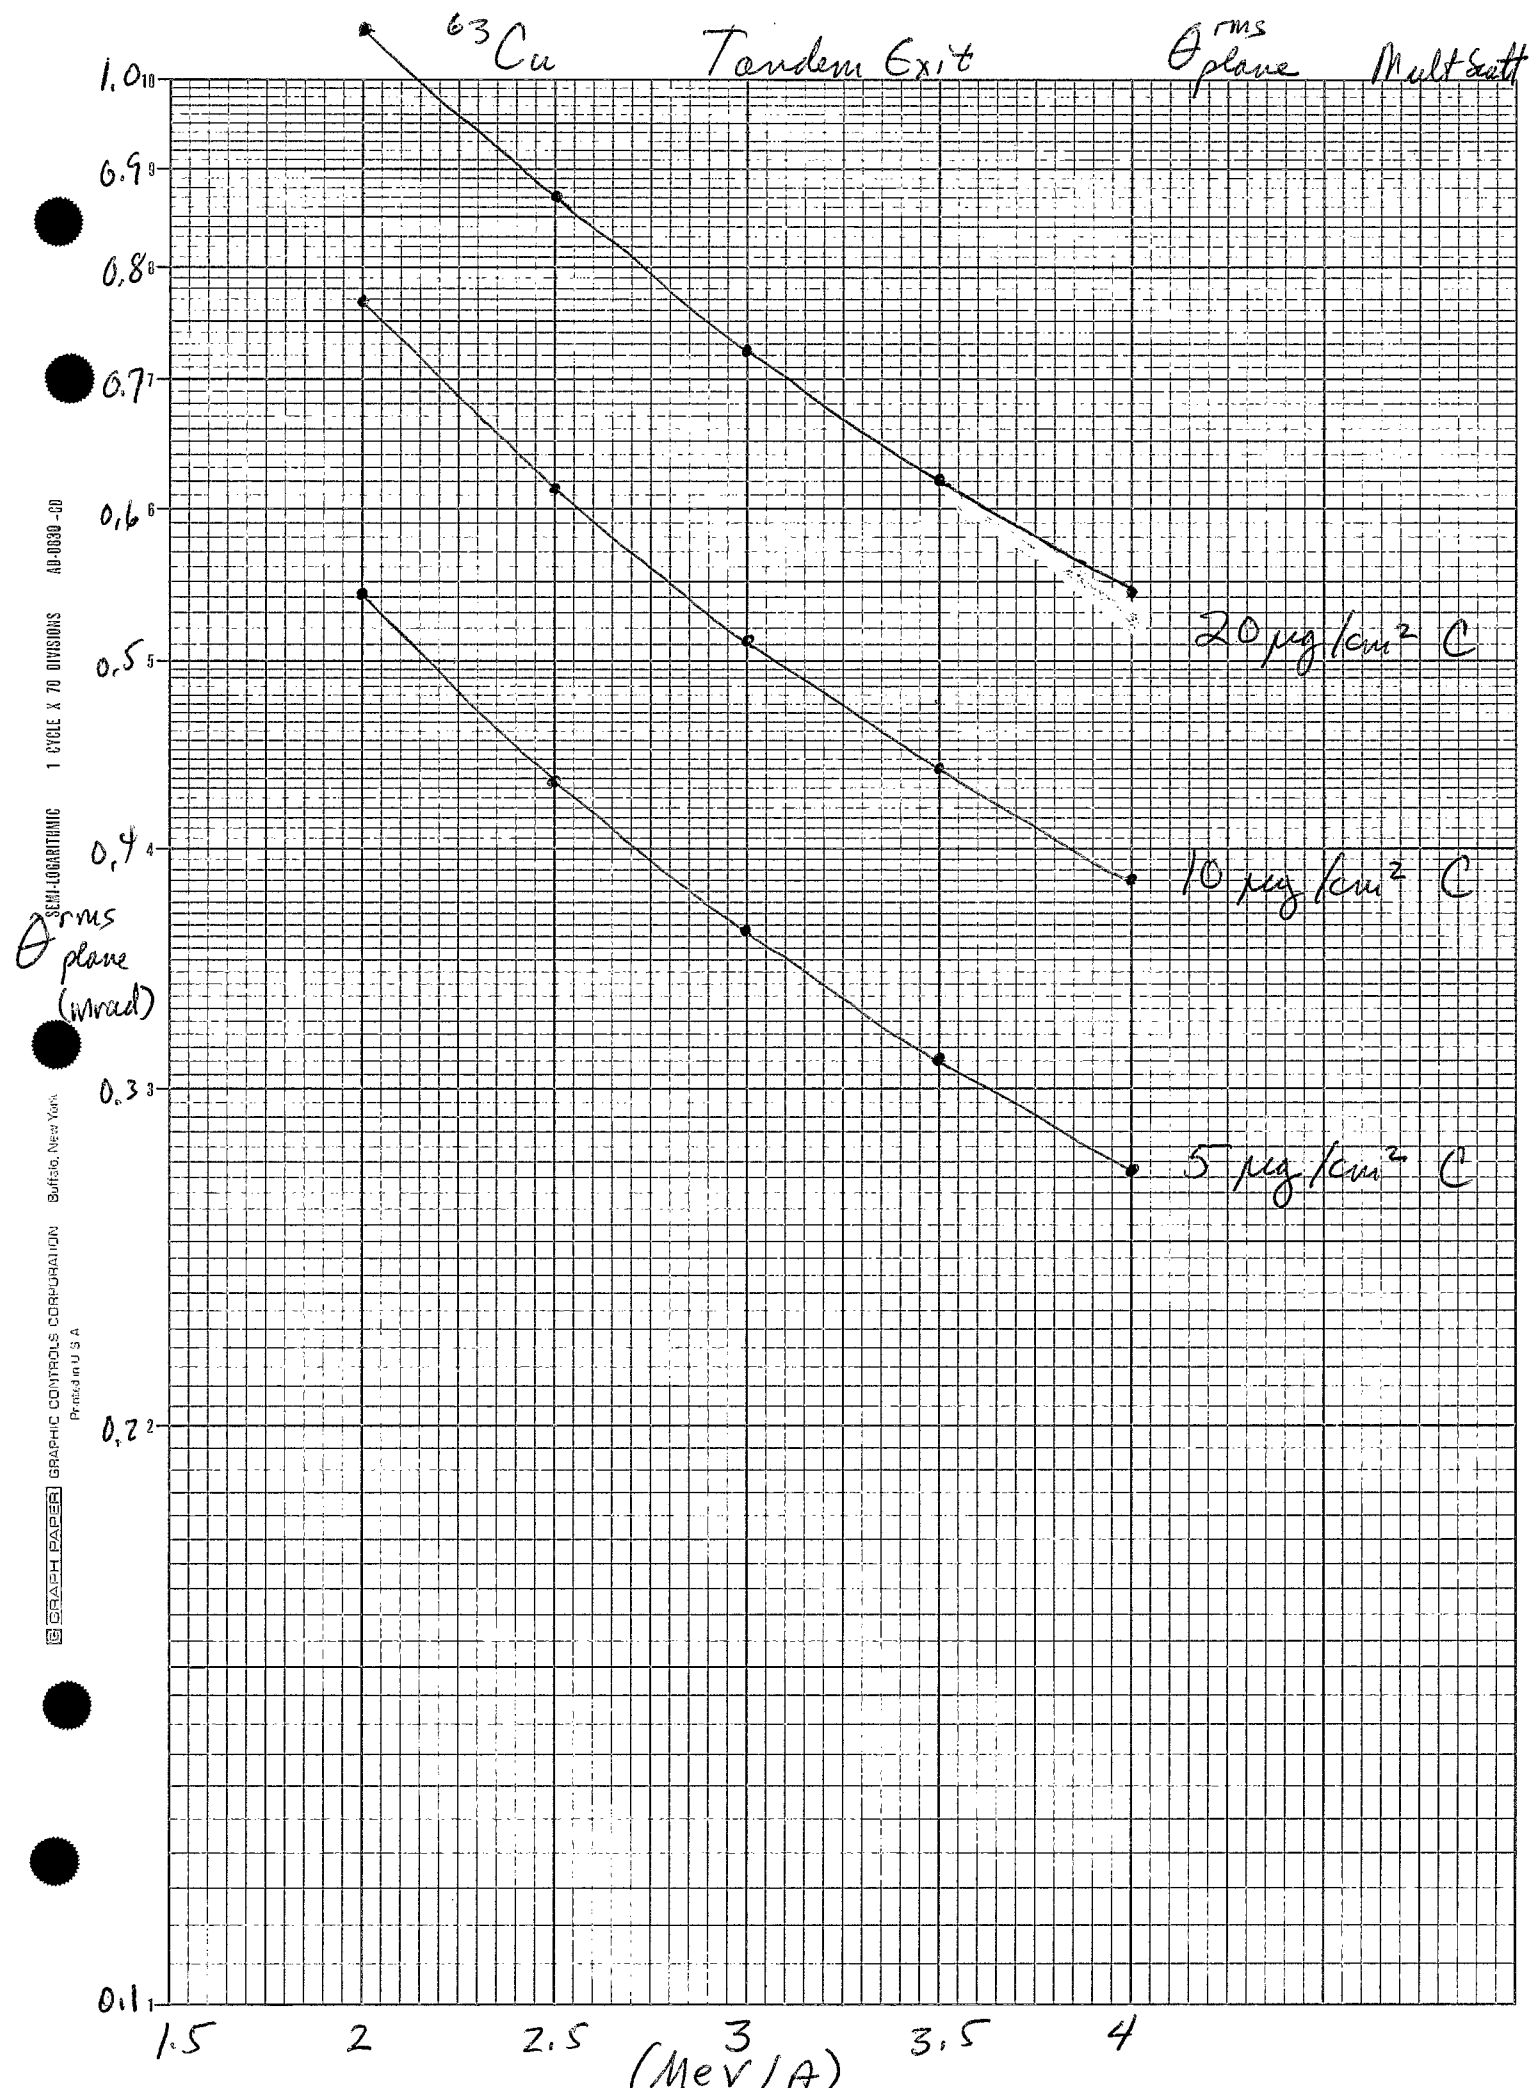
^{63}Cu Tandem Exit
θ^{rms}_{plane} Mult Scatt
20 μg/cm² C
10 μg/cm² C
5 μg/cm² C
θ^{rms}_{plane} (mrad)
1.0 0.9 0.8 0.7 0.6 0.5 0.4 0.3 0.2 0.1
1.5 2 2.5 3 3.5 4
(MeV/A)
SEMI-LOGARITHMIC 1 CYCLE X 70 DIVISIONS AD-0030-00
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

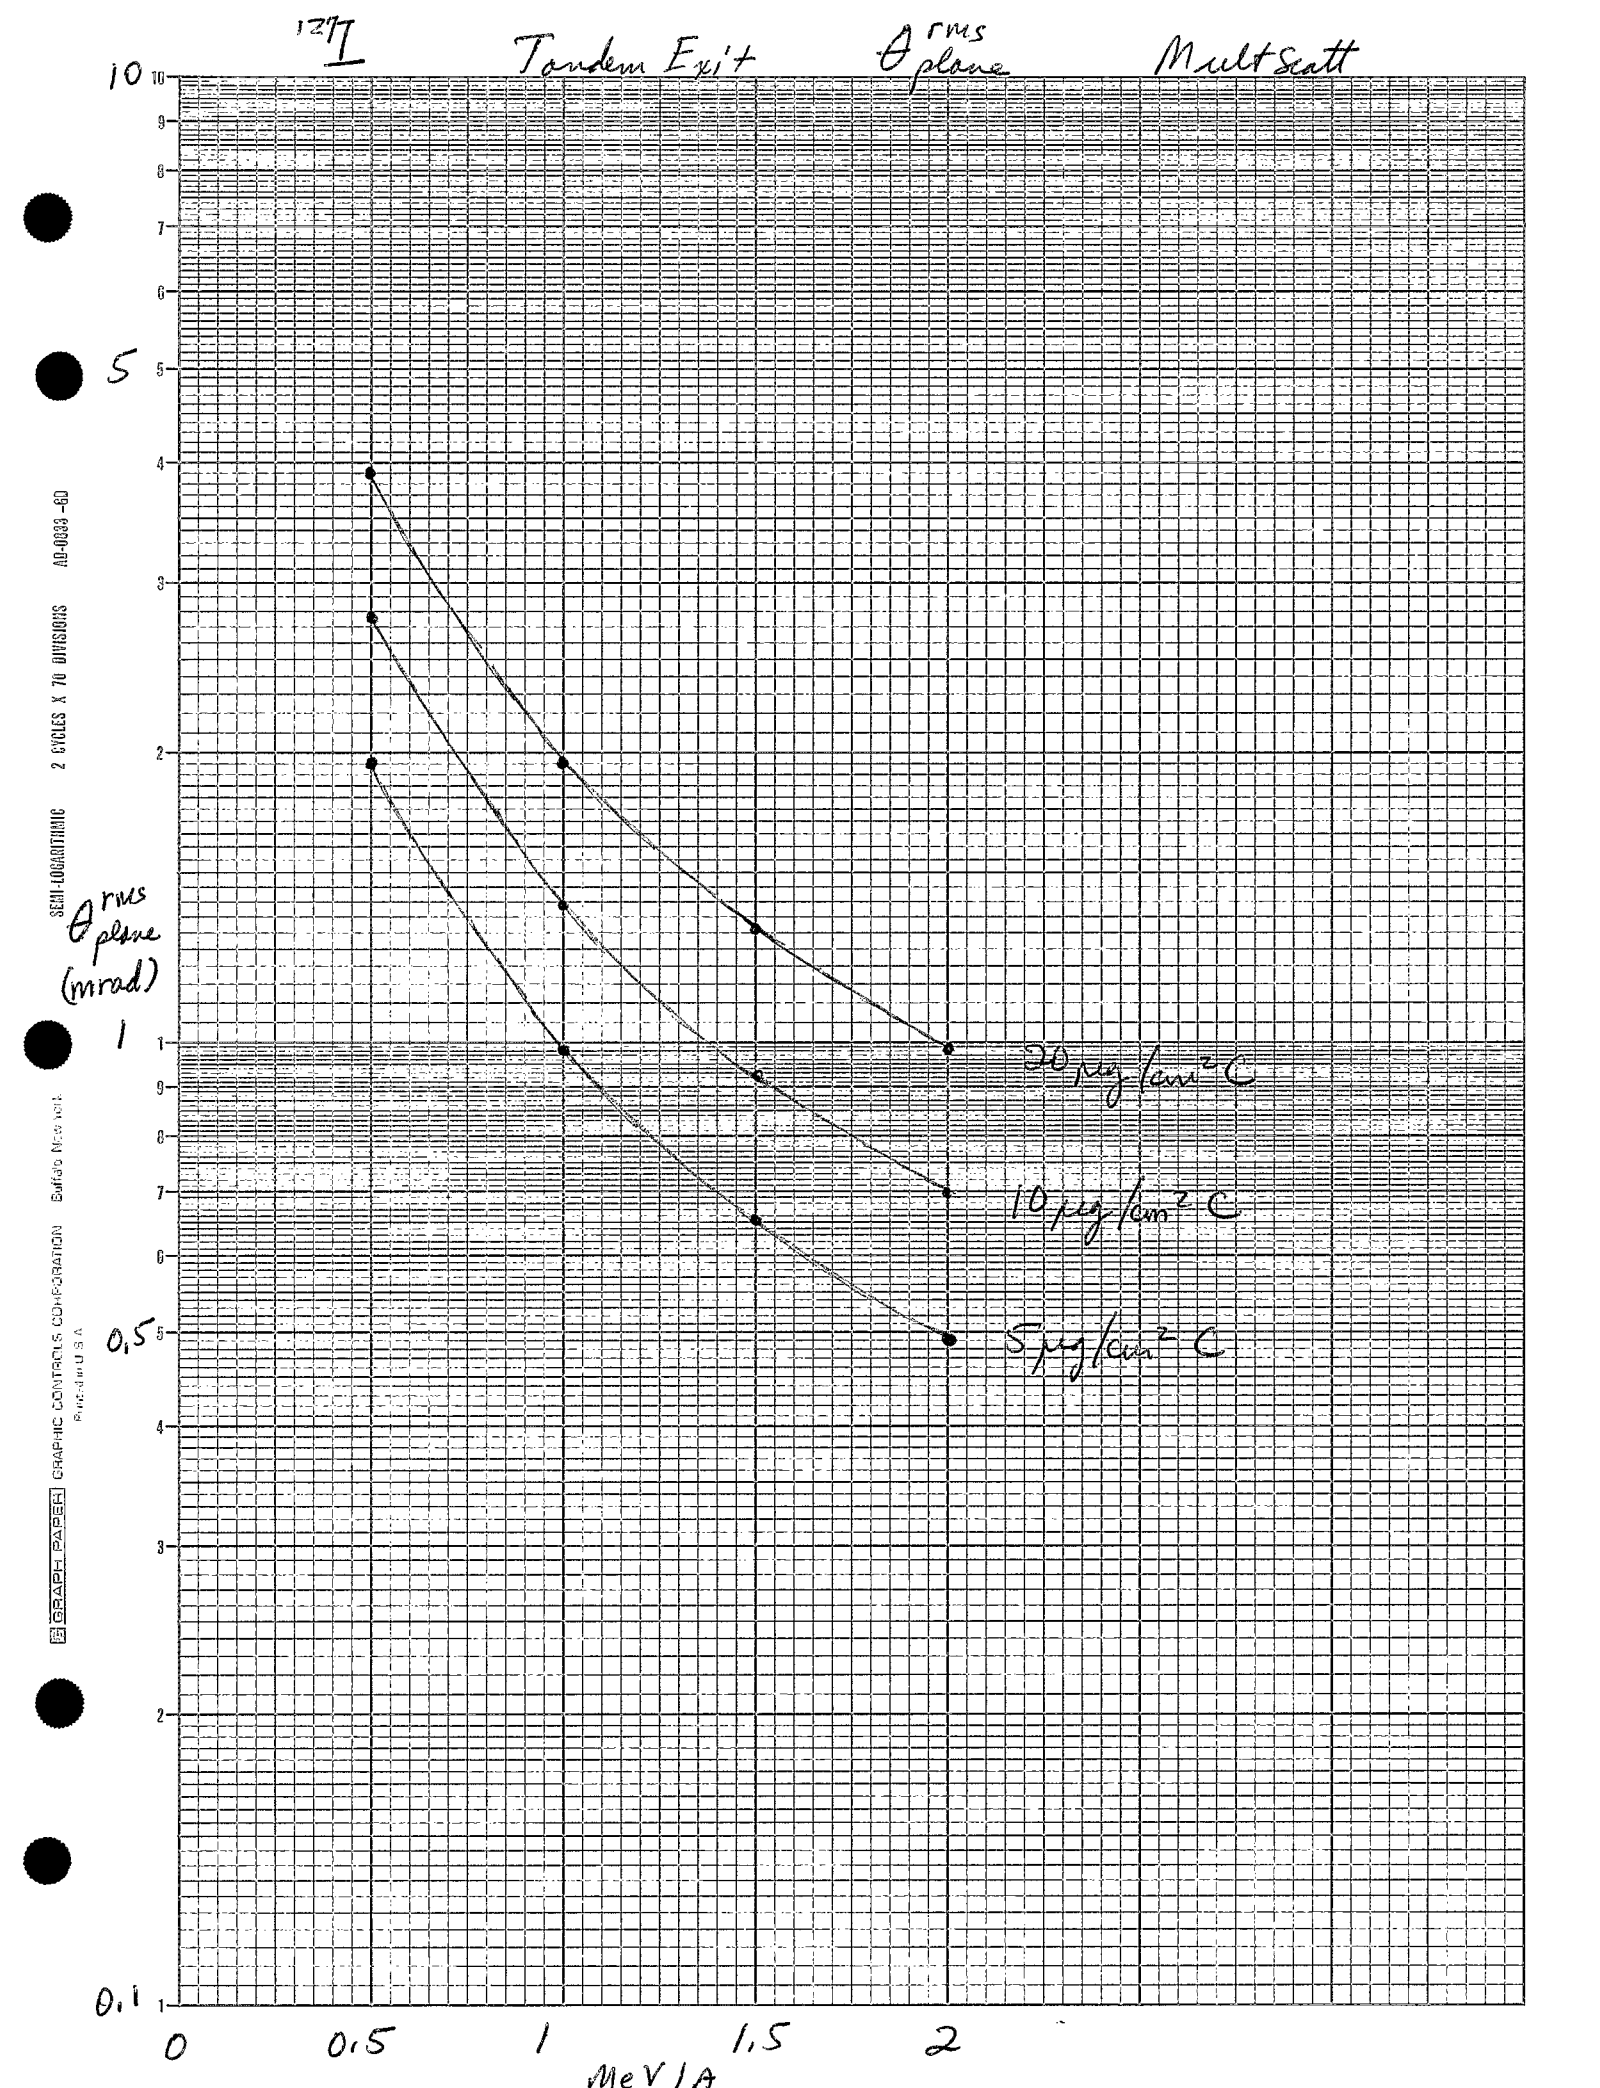
^{127}I Tandem Exit θ^{rms}_{plane} MultScatt
θ^{rms}_{plane} (mrad)
MeV/A
20 μg/cm² C
10 μg/cm² C
5 μg/cm² C
10
5
1
0.5
0.1
0
0.5
1
1.5
2
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS A0-0333-6D
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York Printed in U.S.A.

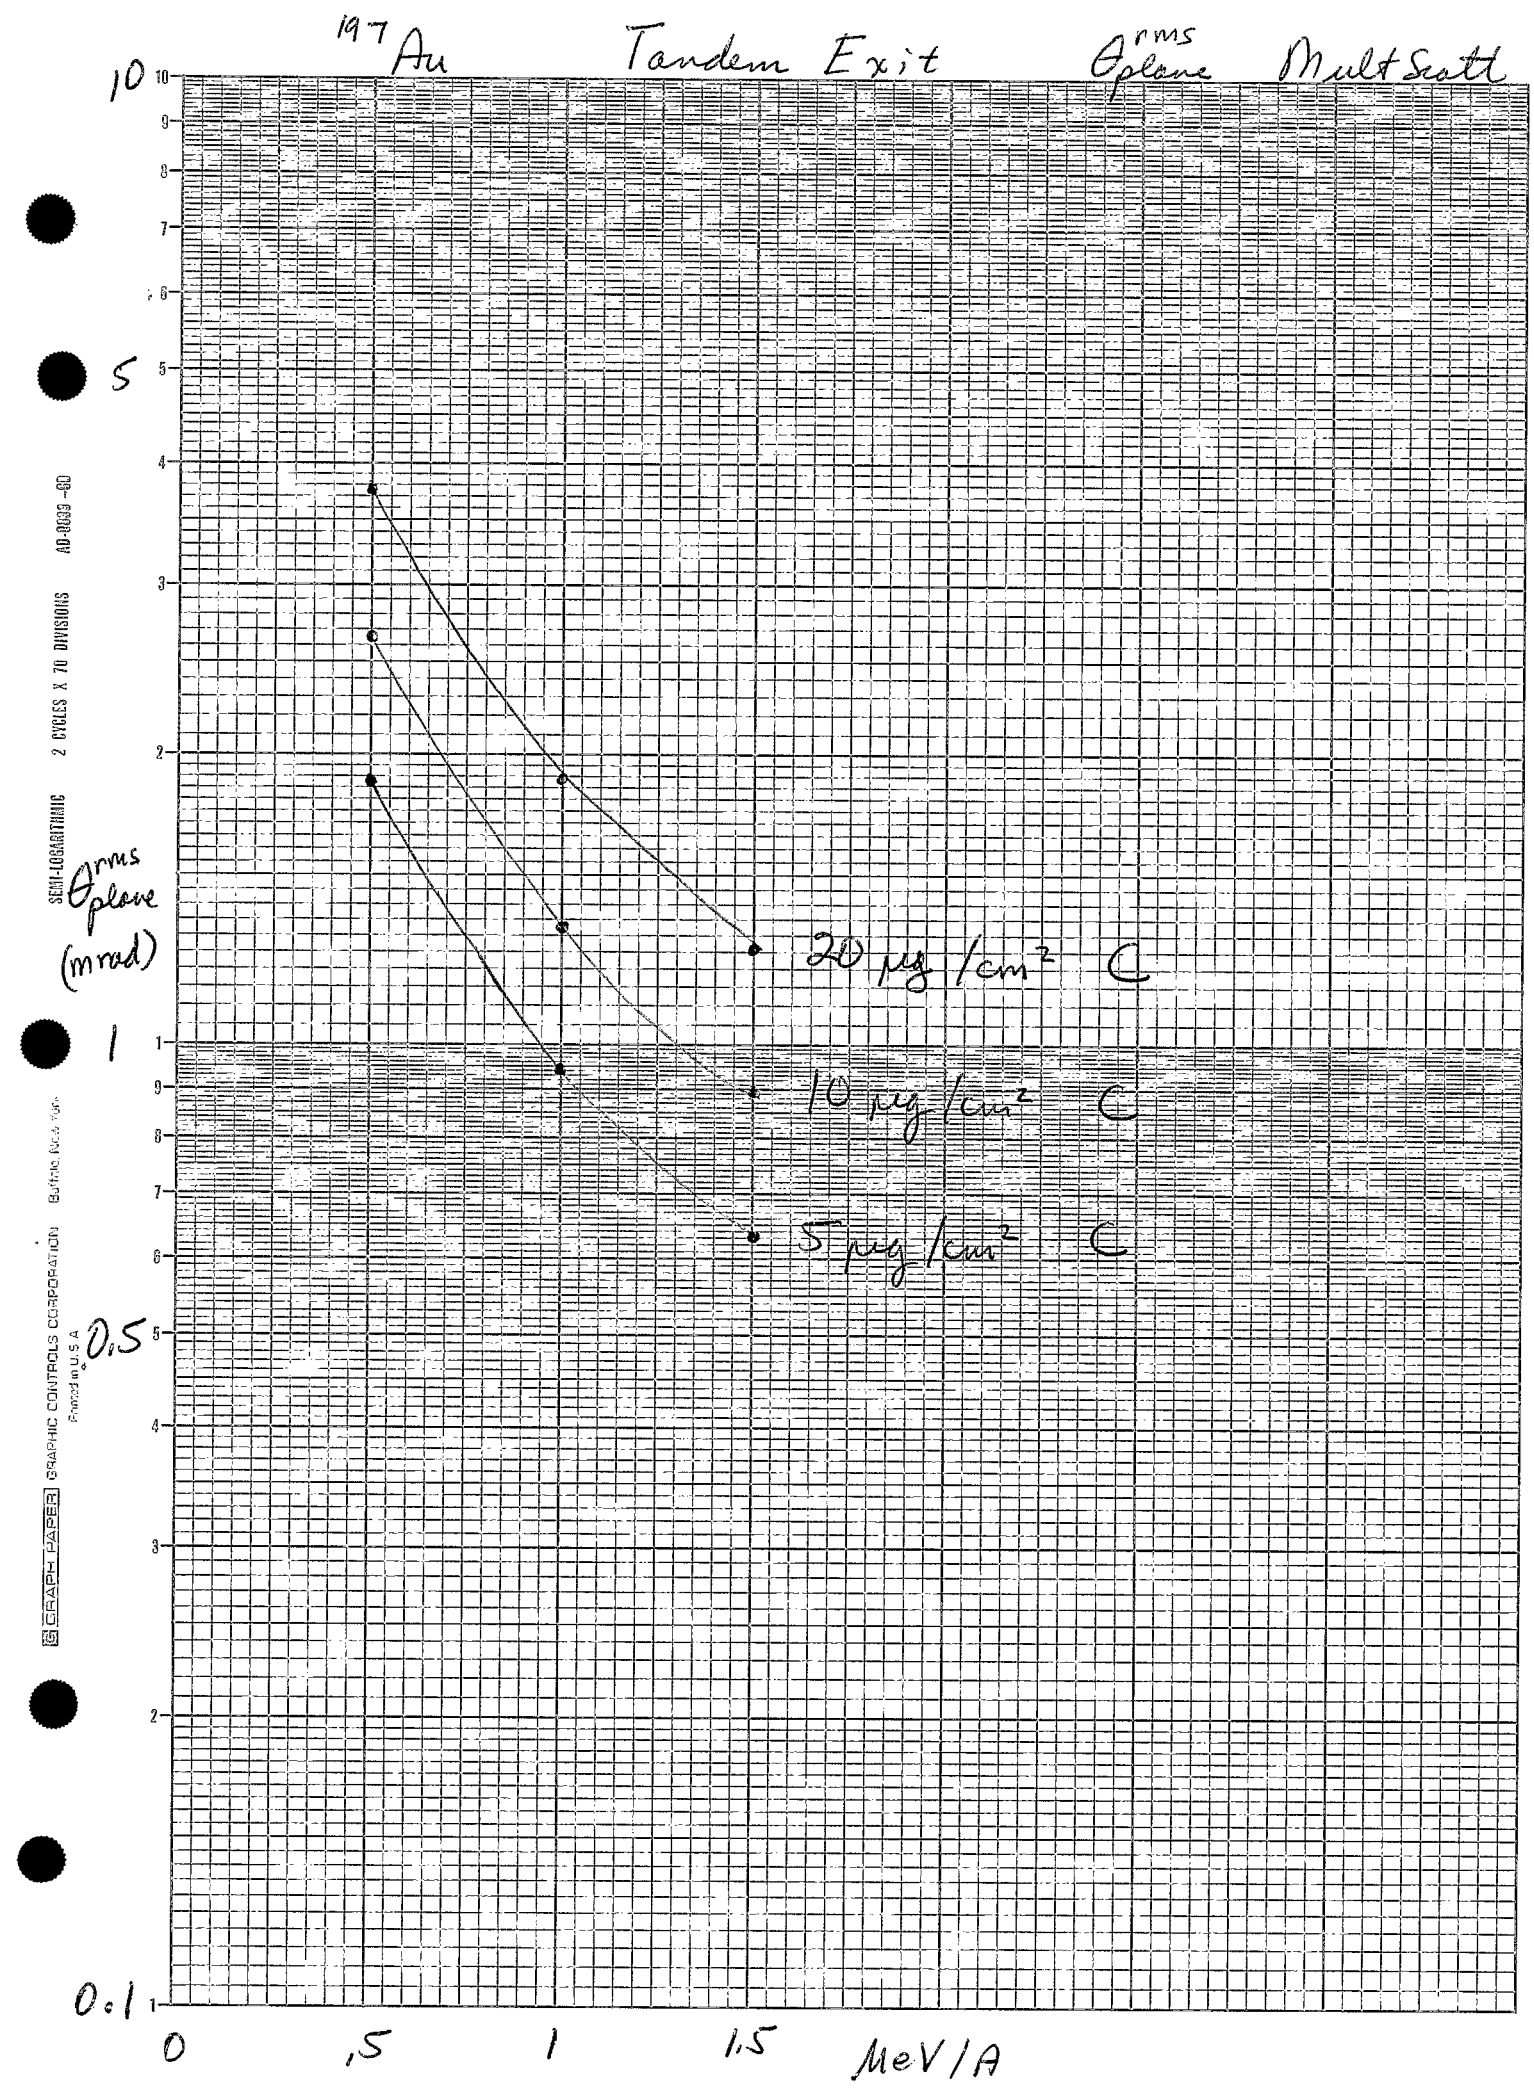
197 Au Tandem Exit θ^{rms}_{plane} MultScatt
10
5
1
0.5
0.1
θ^{rms}_{plane} (mrad)
20 μg/cm²
10 μg/cm²
5 μg/cm²
0
.5
1
1.5
MeV/A
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-8699-8D
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

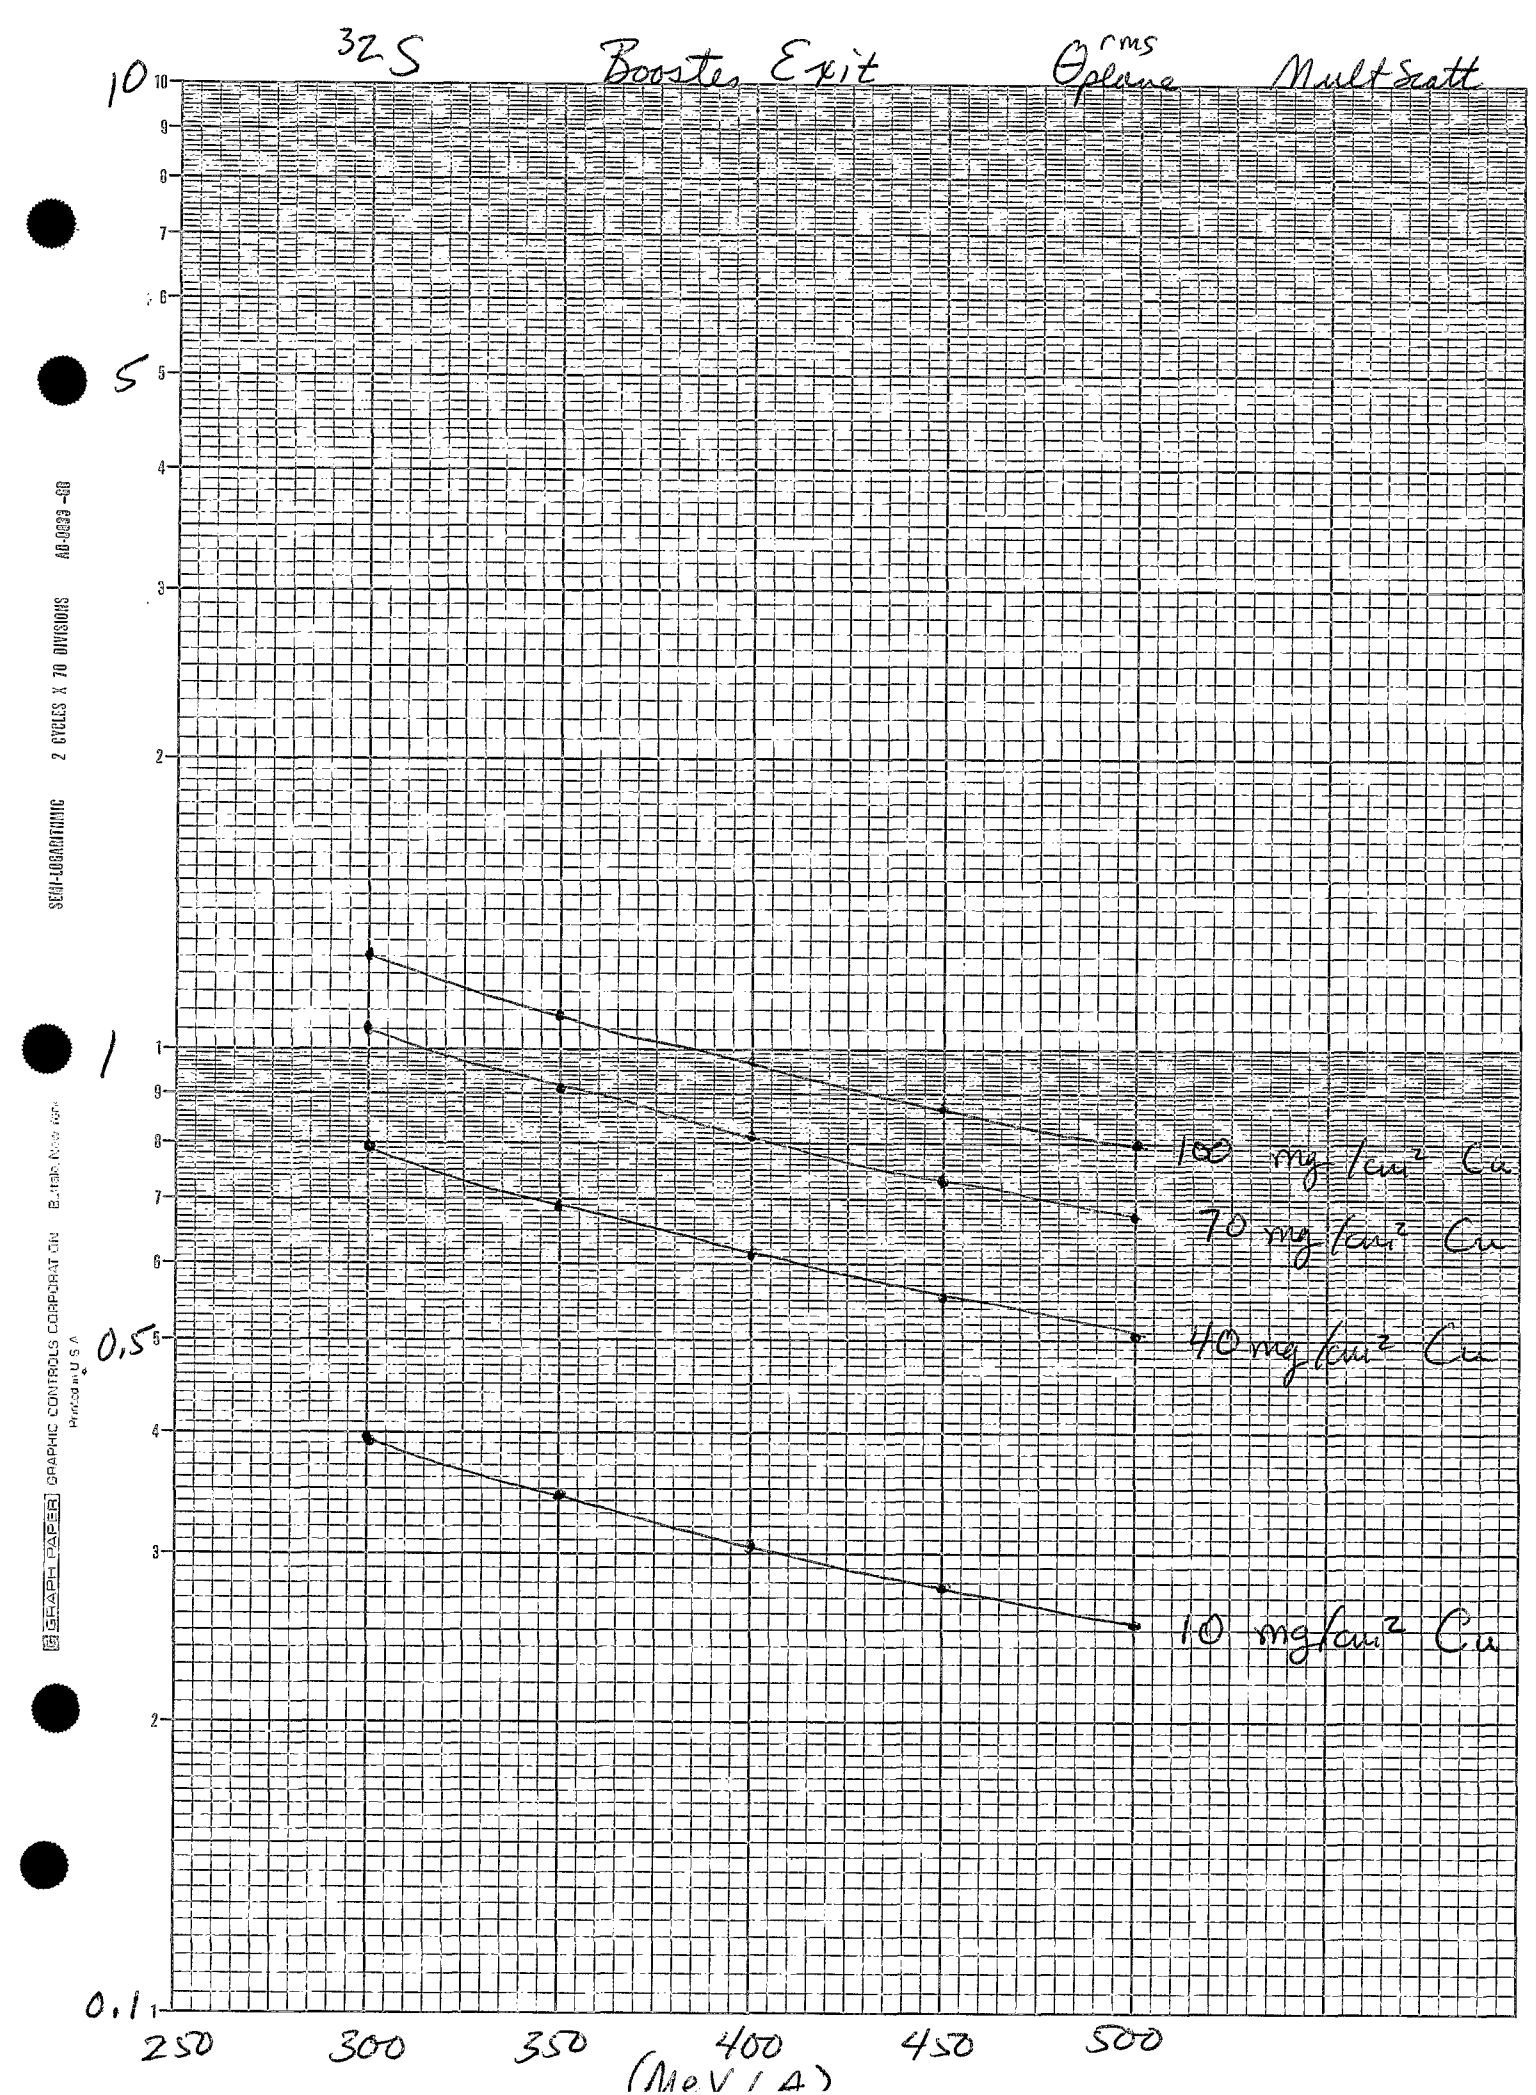
32S
Booster Exit
θ_{rms}
Plane
Mult Scatt
10
5
1
0.5
0.1
100 mg/cm² Cu
70 mg/cm² Cu
40 mg/cm² Cu
10 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS
GRAPH PAPER GRAPHIC CONTROLS CORPORATION

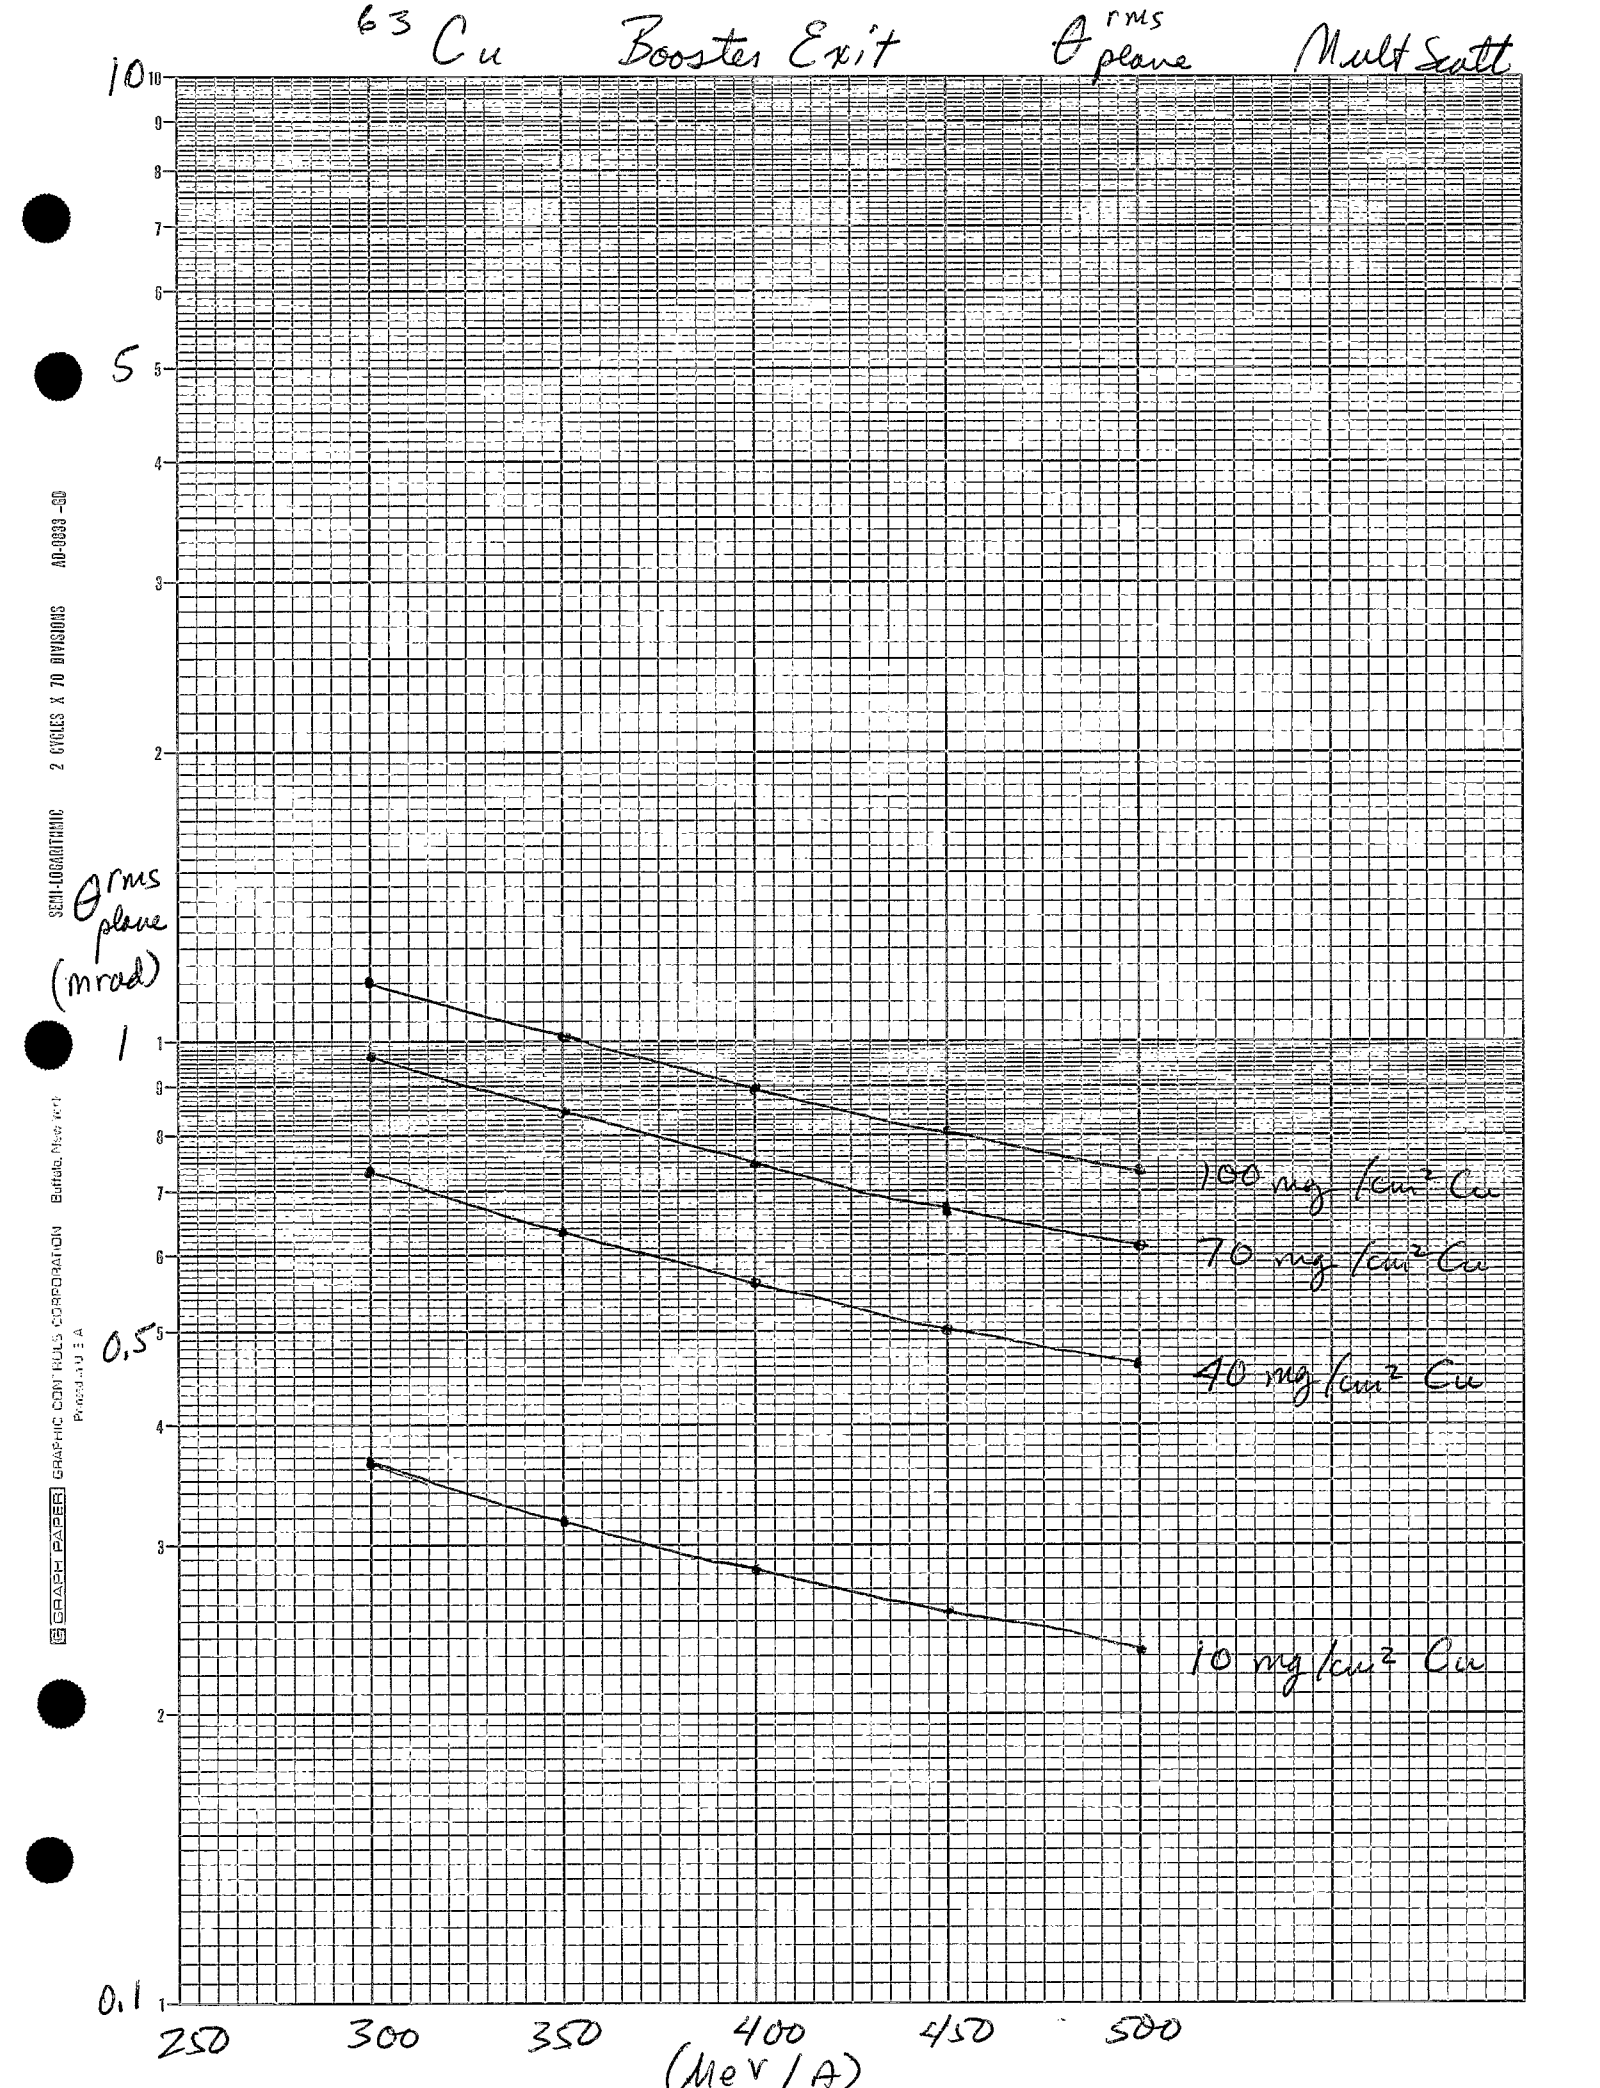
63 Cu Booster Exit
θ rms plane
Mult Scatt
θ rms plane (mrad)
10
5
1
0.5
0.1
100 mg/cm² Cu
70 mg/cm² Cu
40 mg/cm² Cu
10 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

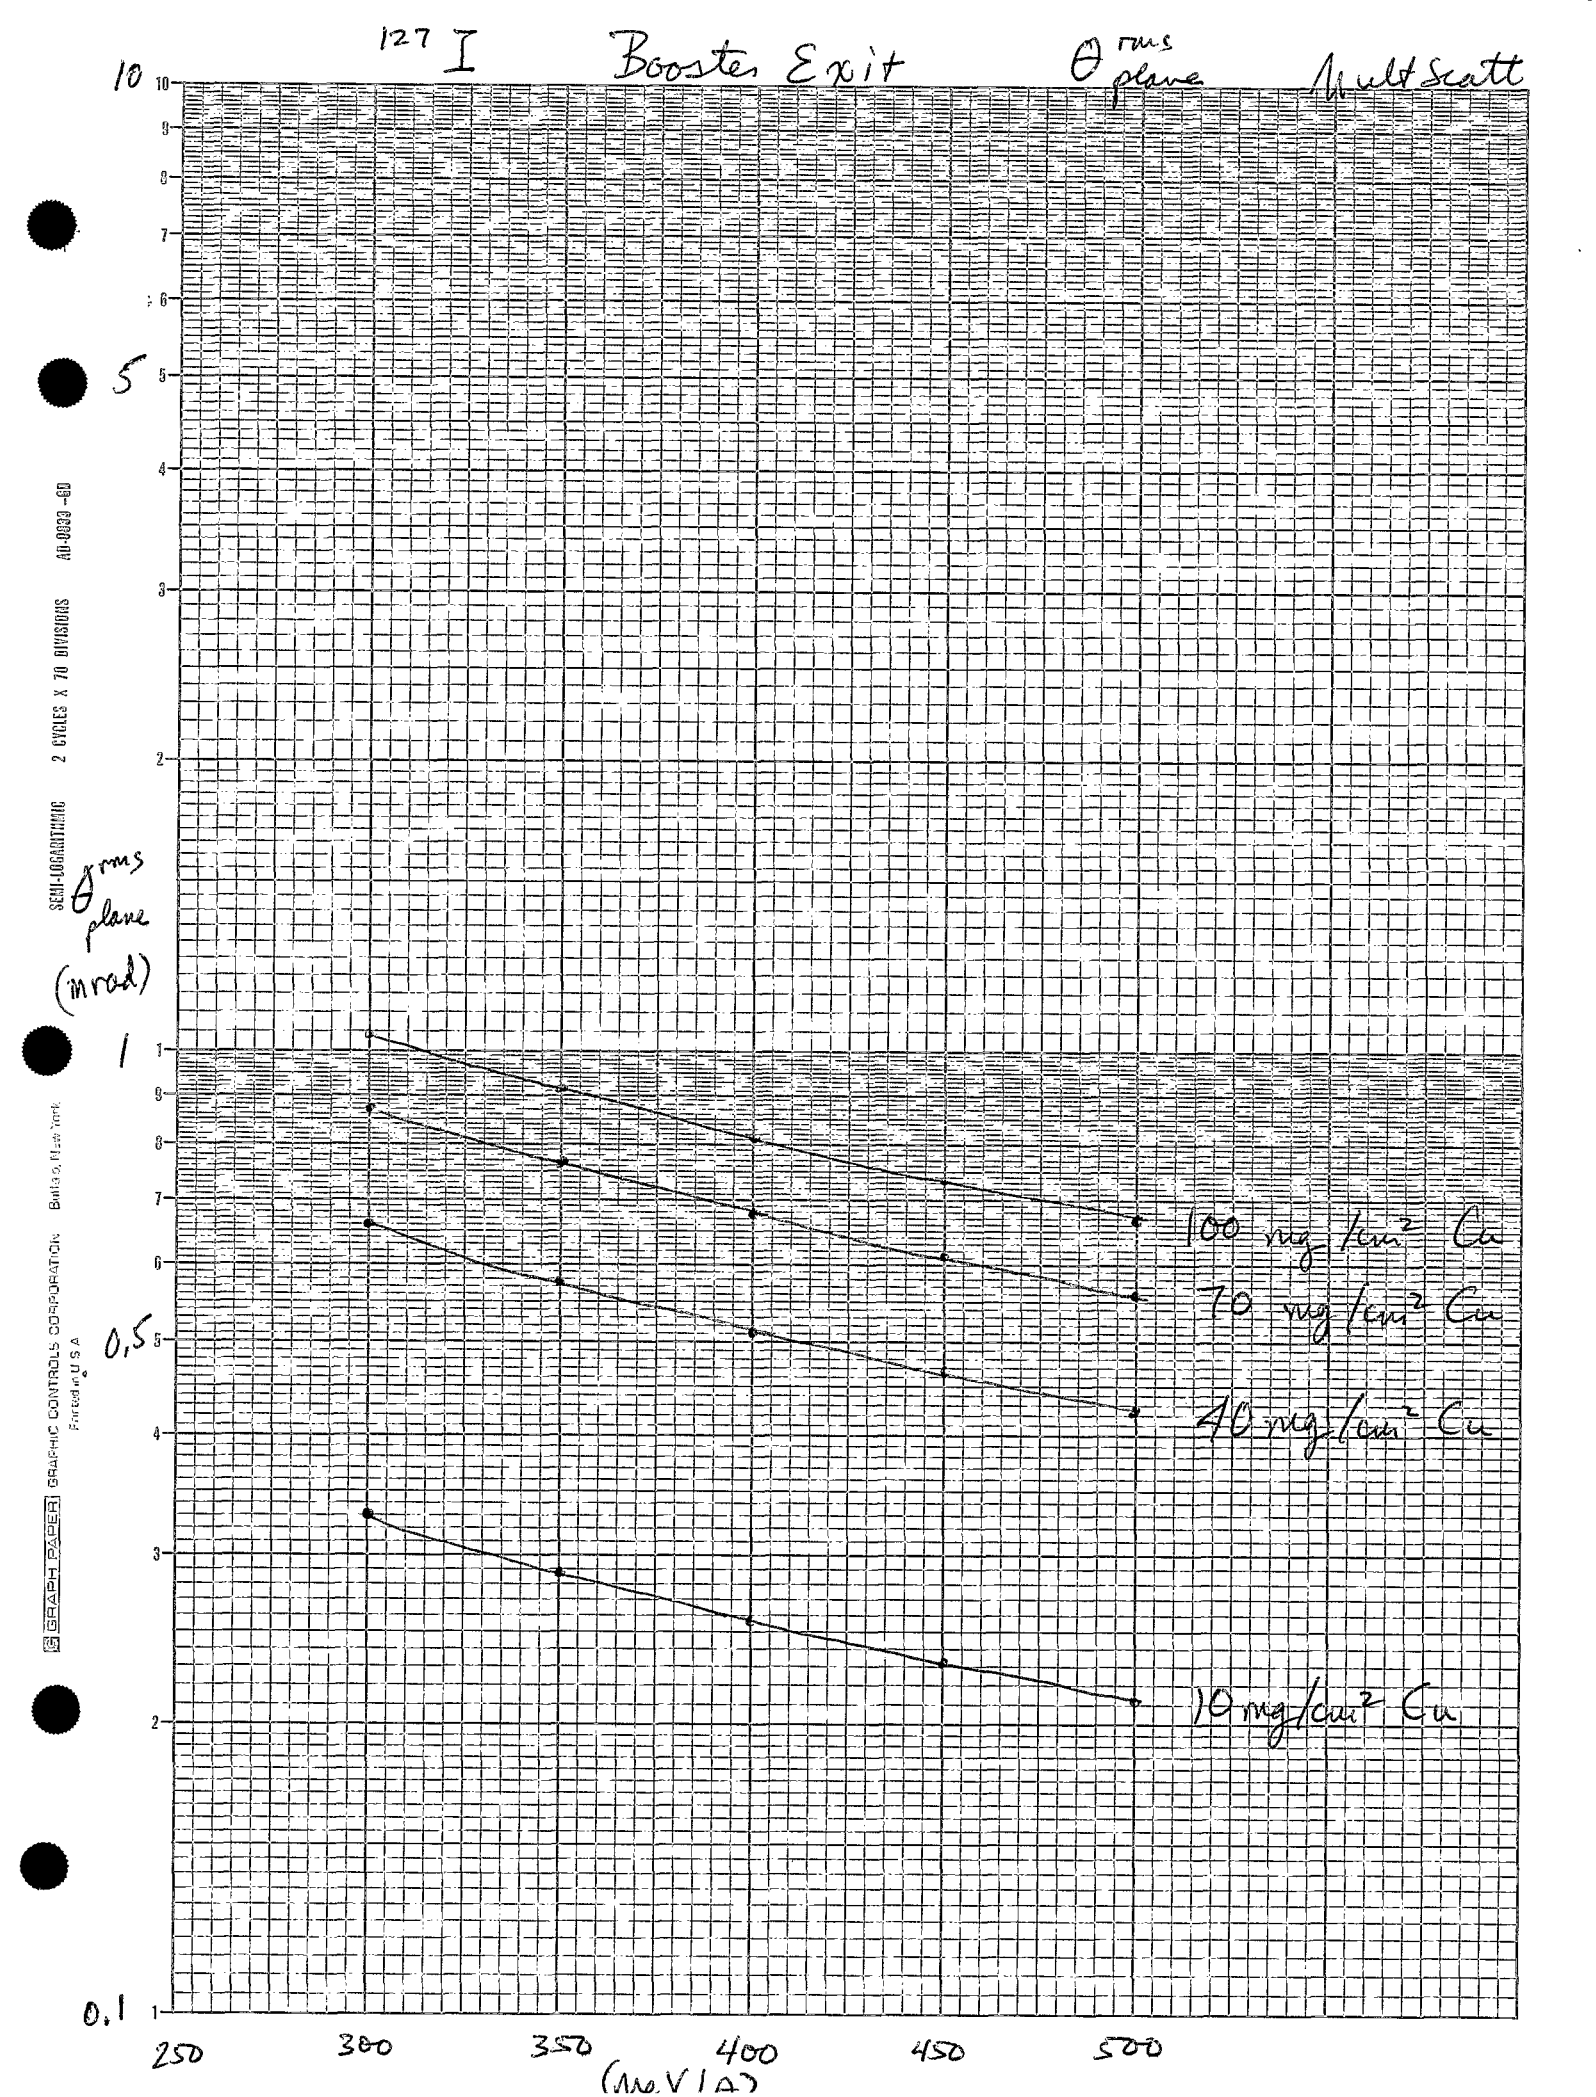
127 I Booster Exit θ^{rms}_{plane} Mult Scatt
θ^{rms}_{plane} (mrad)
10
5
1
0.5
0.1
100 mg/cm² Cu
70 mg/cm² Cu
40 mg/cm² Cu
10 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-8333-60
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

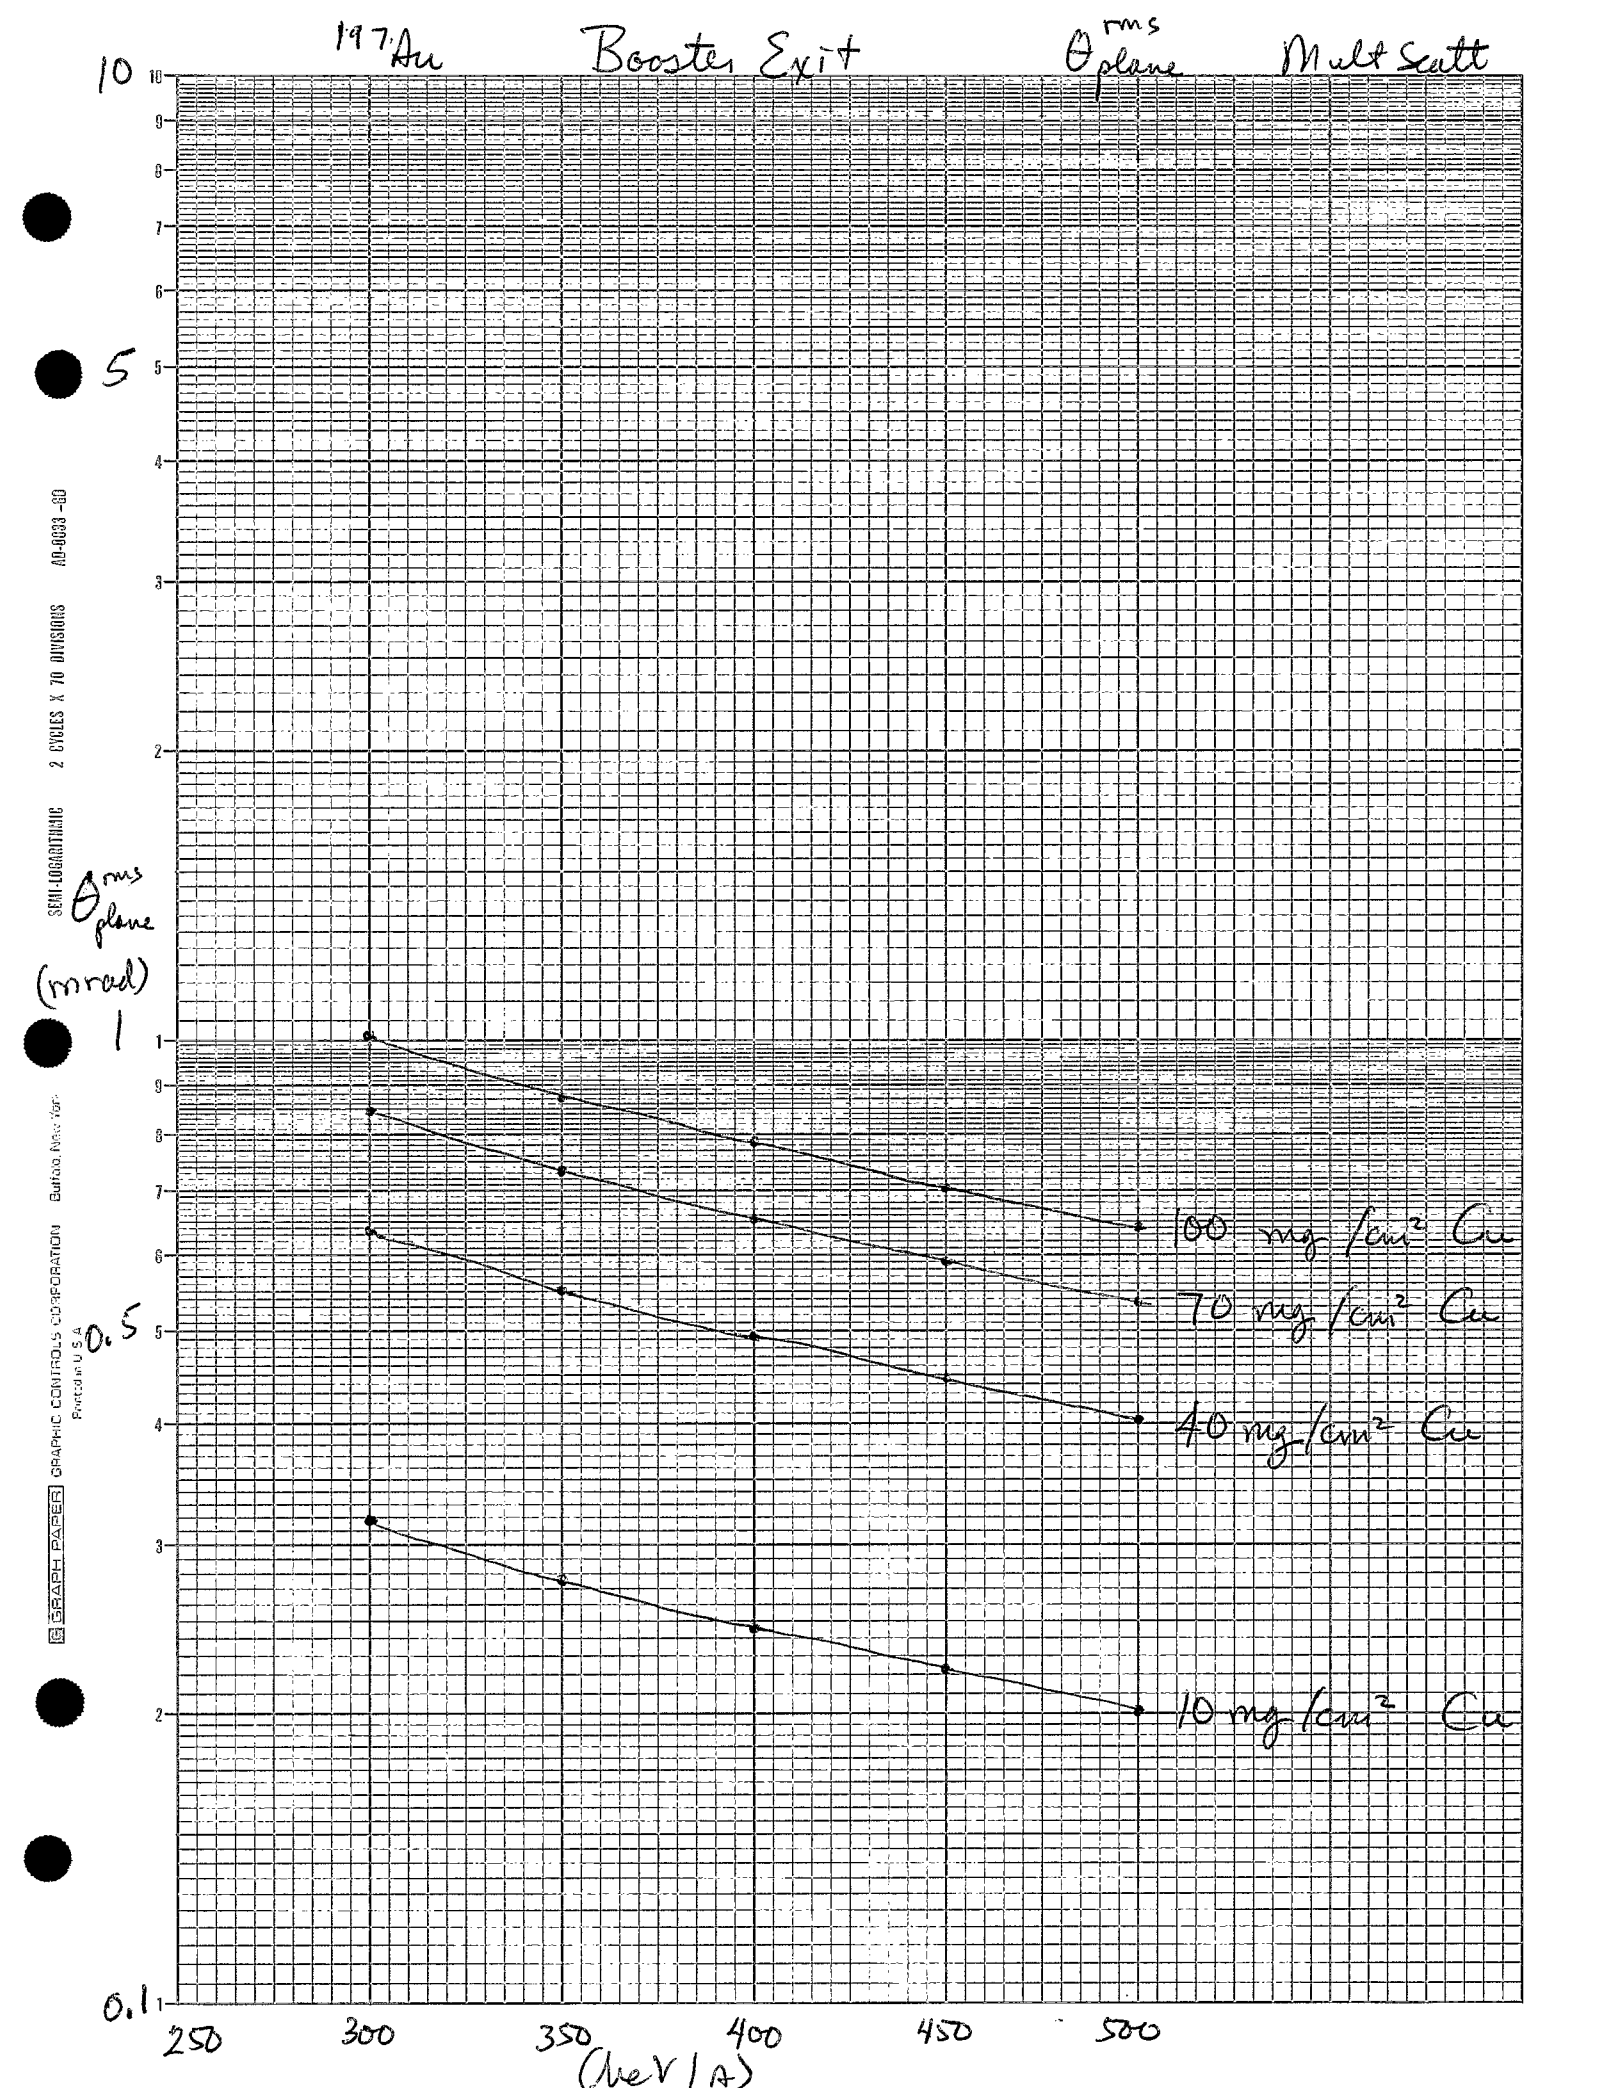
197Au Booster Exit θ rms plane Mult Scatt
10
5
1
0.5
0.1
θ rms plane (mrad)
100 mg/cm² Cu
70 mg/cm² Cu
40 mg/cm² Cu
10 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-6693-3D
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

Tandem Exit, Carbon, β^*_{max} values for $\Delta\varepsilon = 0.5\pi$ mm mrad

Ion	MeV/A	5 μg/cm²	10 μg/cm²	20 μg/cm²
^{12}C	6.5	15.1	7.51	3.77
	7	17.5	8.75	4.35
	7.5	20.0	10.0	5.01
	8	22.8	11.4	5.71
	8.5	25.9	12.5	6.42
^{32}S	3.5	4.38	2.19	1.09
	4	5.71	2.85	1.42
	4.5	7.23	3.61	1.81
	5	8.90	4.45	2.23
	5.5	10.8	5.41	2.71
^{63}Cu	2	1.69	0.85	0.42
	2.5	2.64	1.32	0.66
	3	3.79	1.89	0.95
	3.5	5.17	2.59	1.29
	4	6.76	3.38	1.69
^{127}I	.5	0.13	0.065	0.032
	1	0.51	0.257	0.128
	1.5	1.16	0.579	0.29
	2	2.06	1.03	0.51
^{197}Au	.5	0.14	0.070	0.035
	1	0.56	0.28	0.14
	1.5	1.26	0.63	0.31

Booster Exit, Copper, β^* matching values for $\Delta\varepsilon = 1\pi$ mm mrad

Ion	MeV/A	10 mg/cm^2	40 mg/cm^2	70 mg/cm^2	180 mg/cm^2
^{32}S	300	6.34	1.59	0.91	0.63
	350	8.35	2.09	1.19	0.84
	400	10.5	2.63	1.5	1.05
	450	12.9	3.23	1.84	1.29
	500	15.5	3.88	2.21	1.55
^{63}Cu	300	7.47	1.87	1.07	0.75
	350	9.89	2.47	1.41	0.99
	400	12.5	3.12	1.79	1.25
	450	15.3	3.83	2.19	1.53
	500	18.4	4.6	2.63	1.84
^{127}I	300	9.13	2.28	1.30	0.91
	350	11.97	2.99	1.71	1.20
	400	15.1	3.78	2.16	1.51
	450	18.6	4.65	2.66	1.86
	500	22.2	5.55	3.17	2.22
^{197}Au	300	9.83	2.46	1.40	0.98
	350	13.0	3.25	1.86	1.30
	400	16.4	4.1	2.34	1.64
	450	20.1	5.03	2.87	2.01
	500	24.3	6.08	3.47	2.43

Tandem Exit ^{12}C β^*_{max} values (m) MuHScott

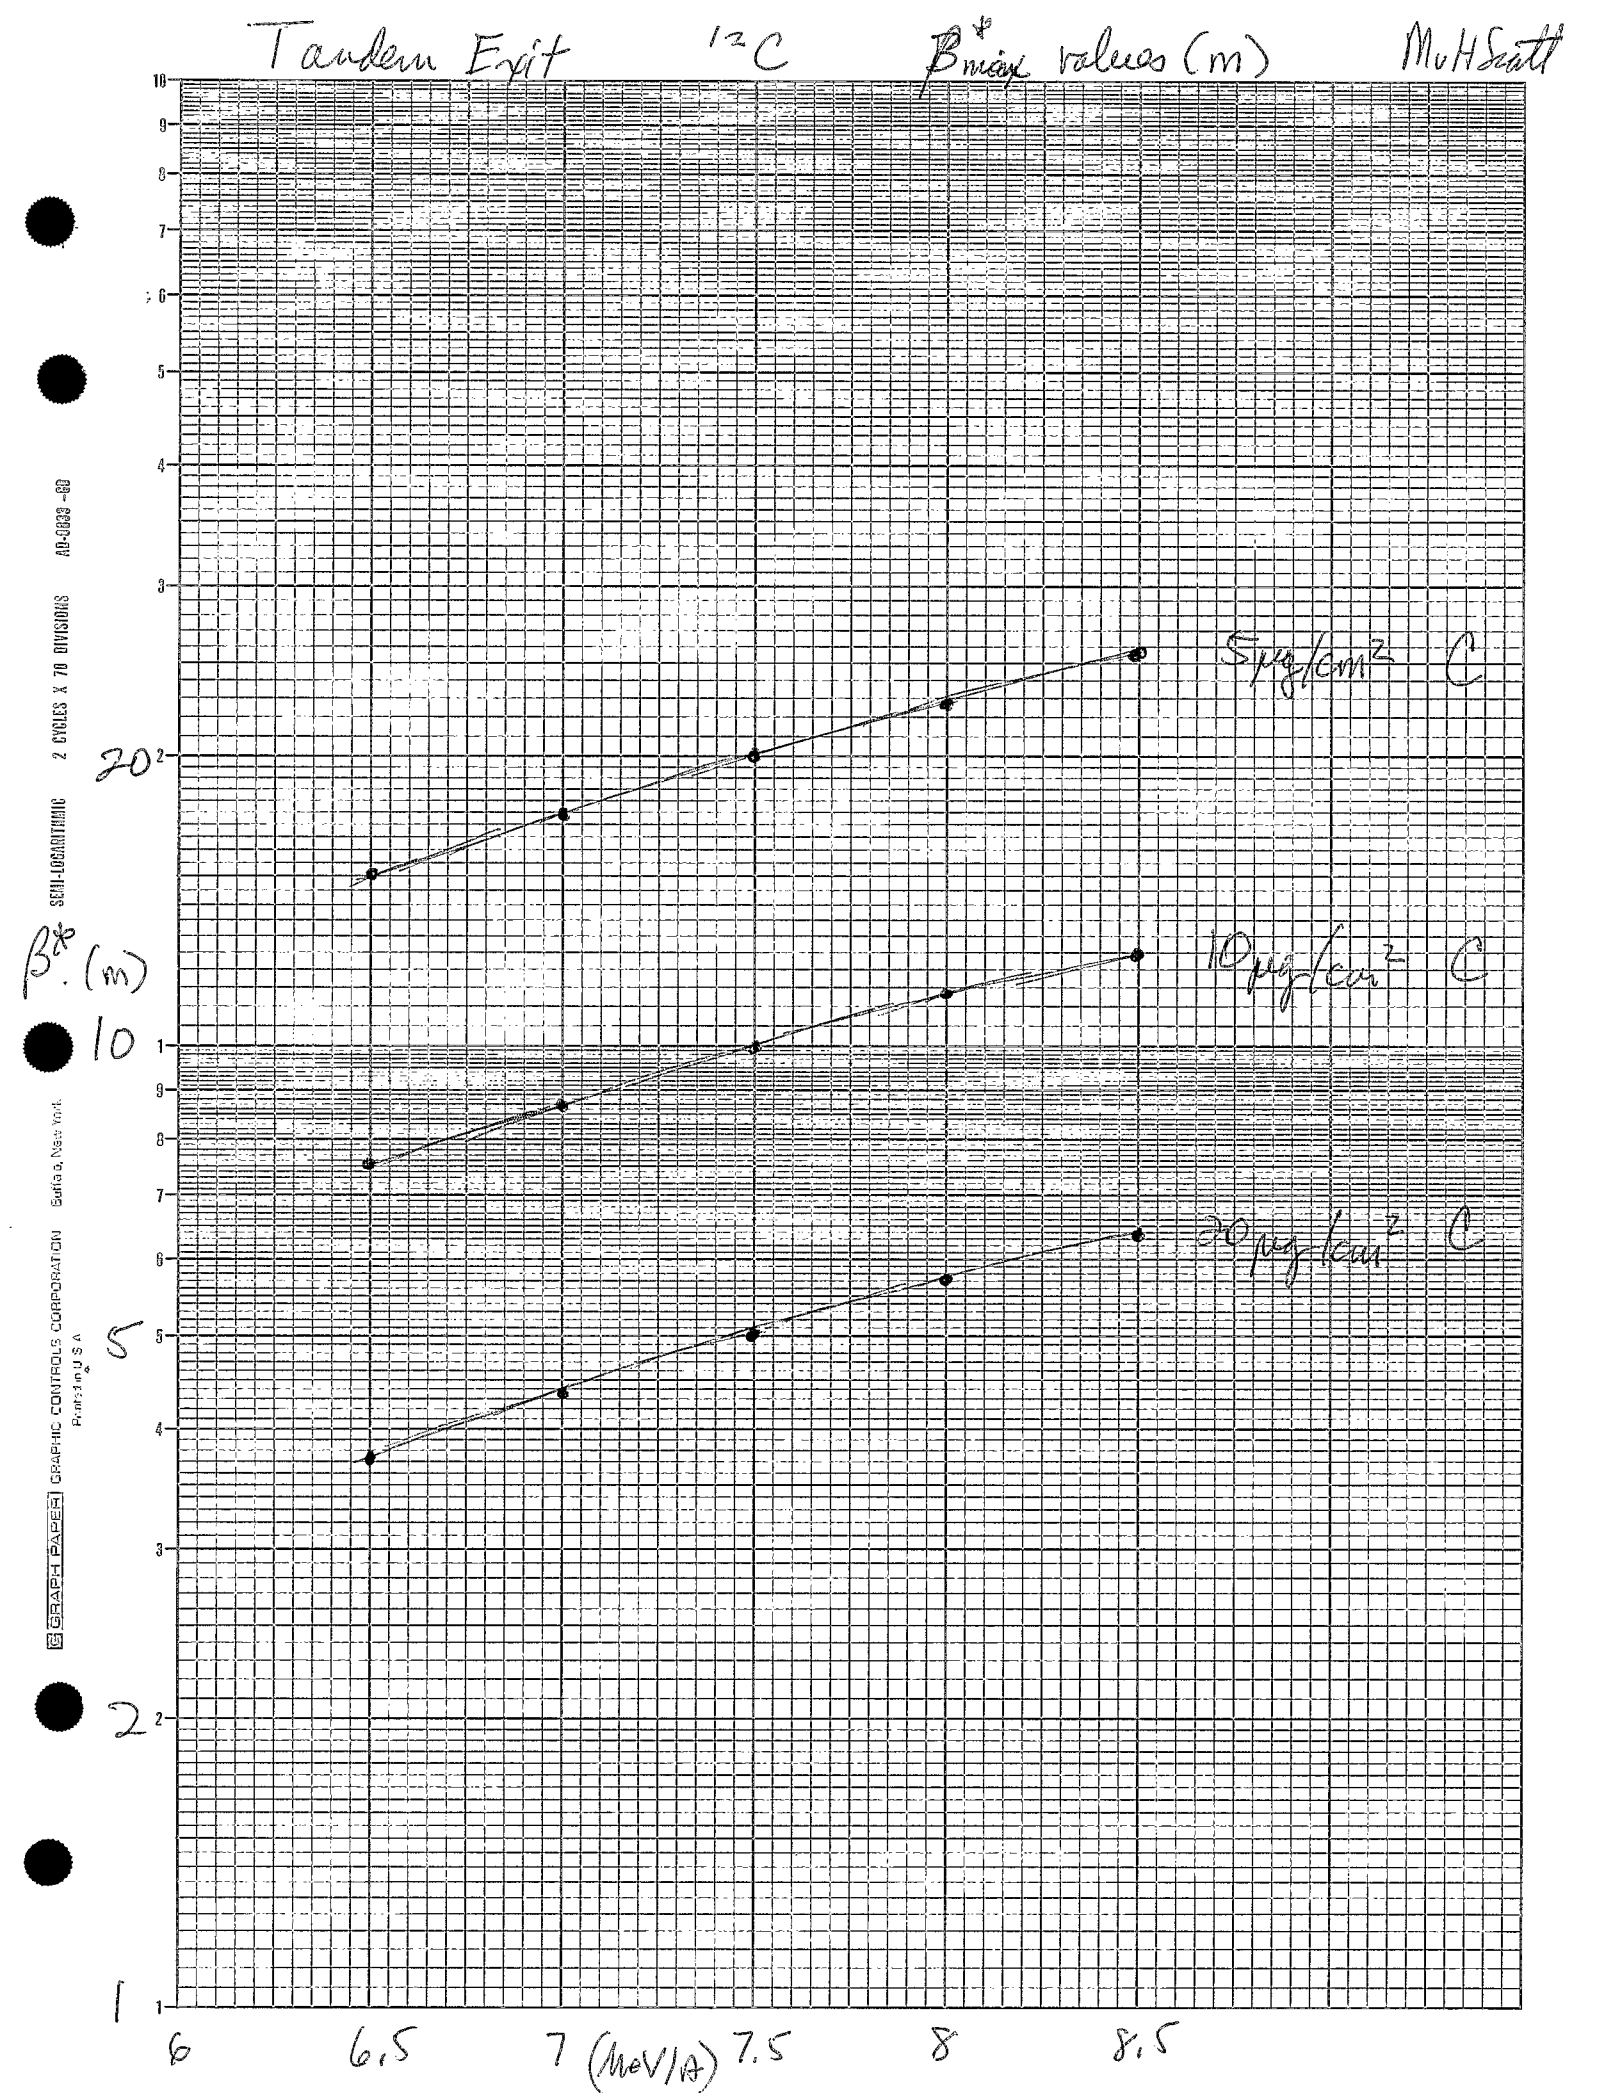

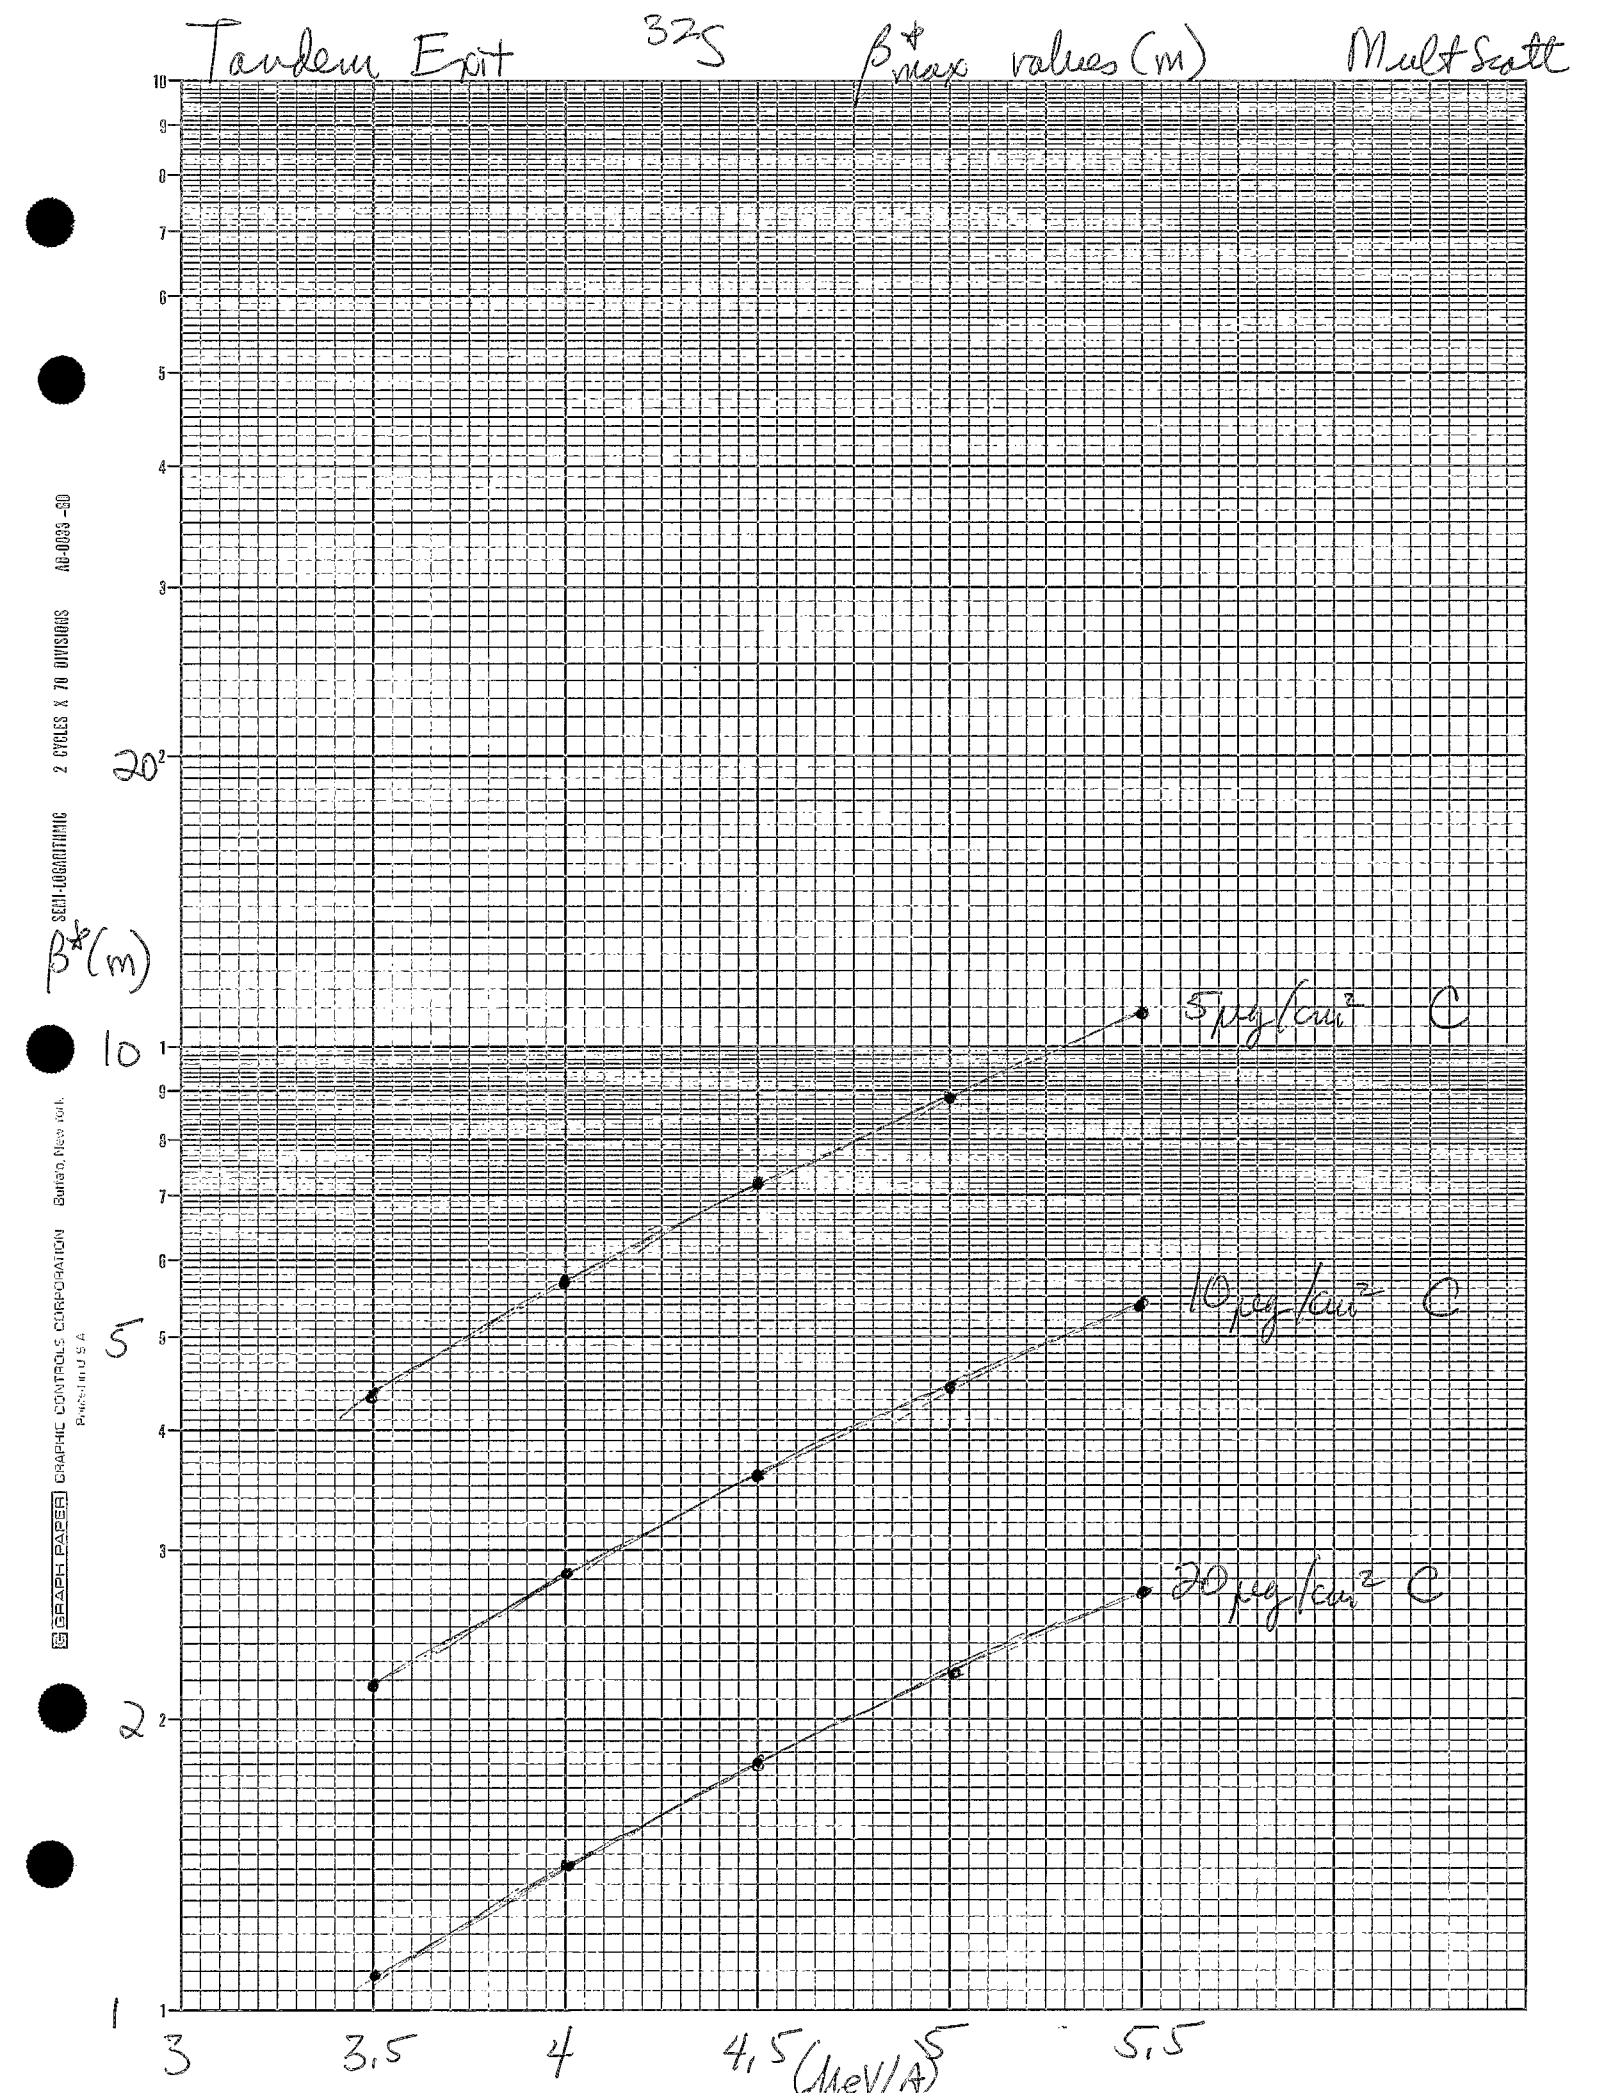
Tandem Exit 32S β^*_{max} values (m) Mult Scatt
β^*(m)
5 μg/cm² C
10 μg/cm² C
20 μg/cm² C
(MeV/A)
3
3.5
4
4.5
5
5.5
10
5
2
1
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-0035-SD
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

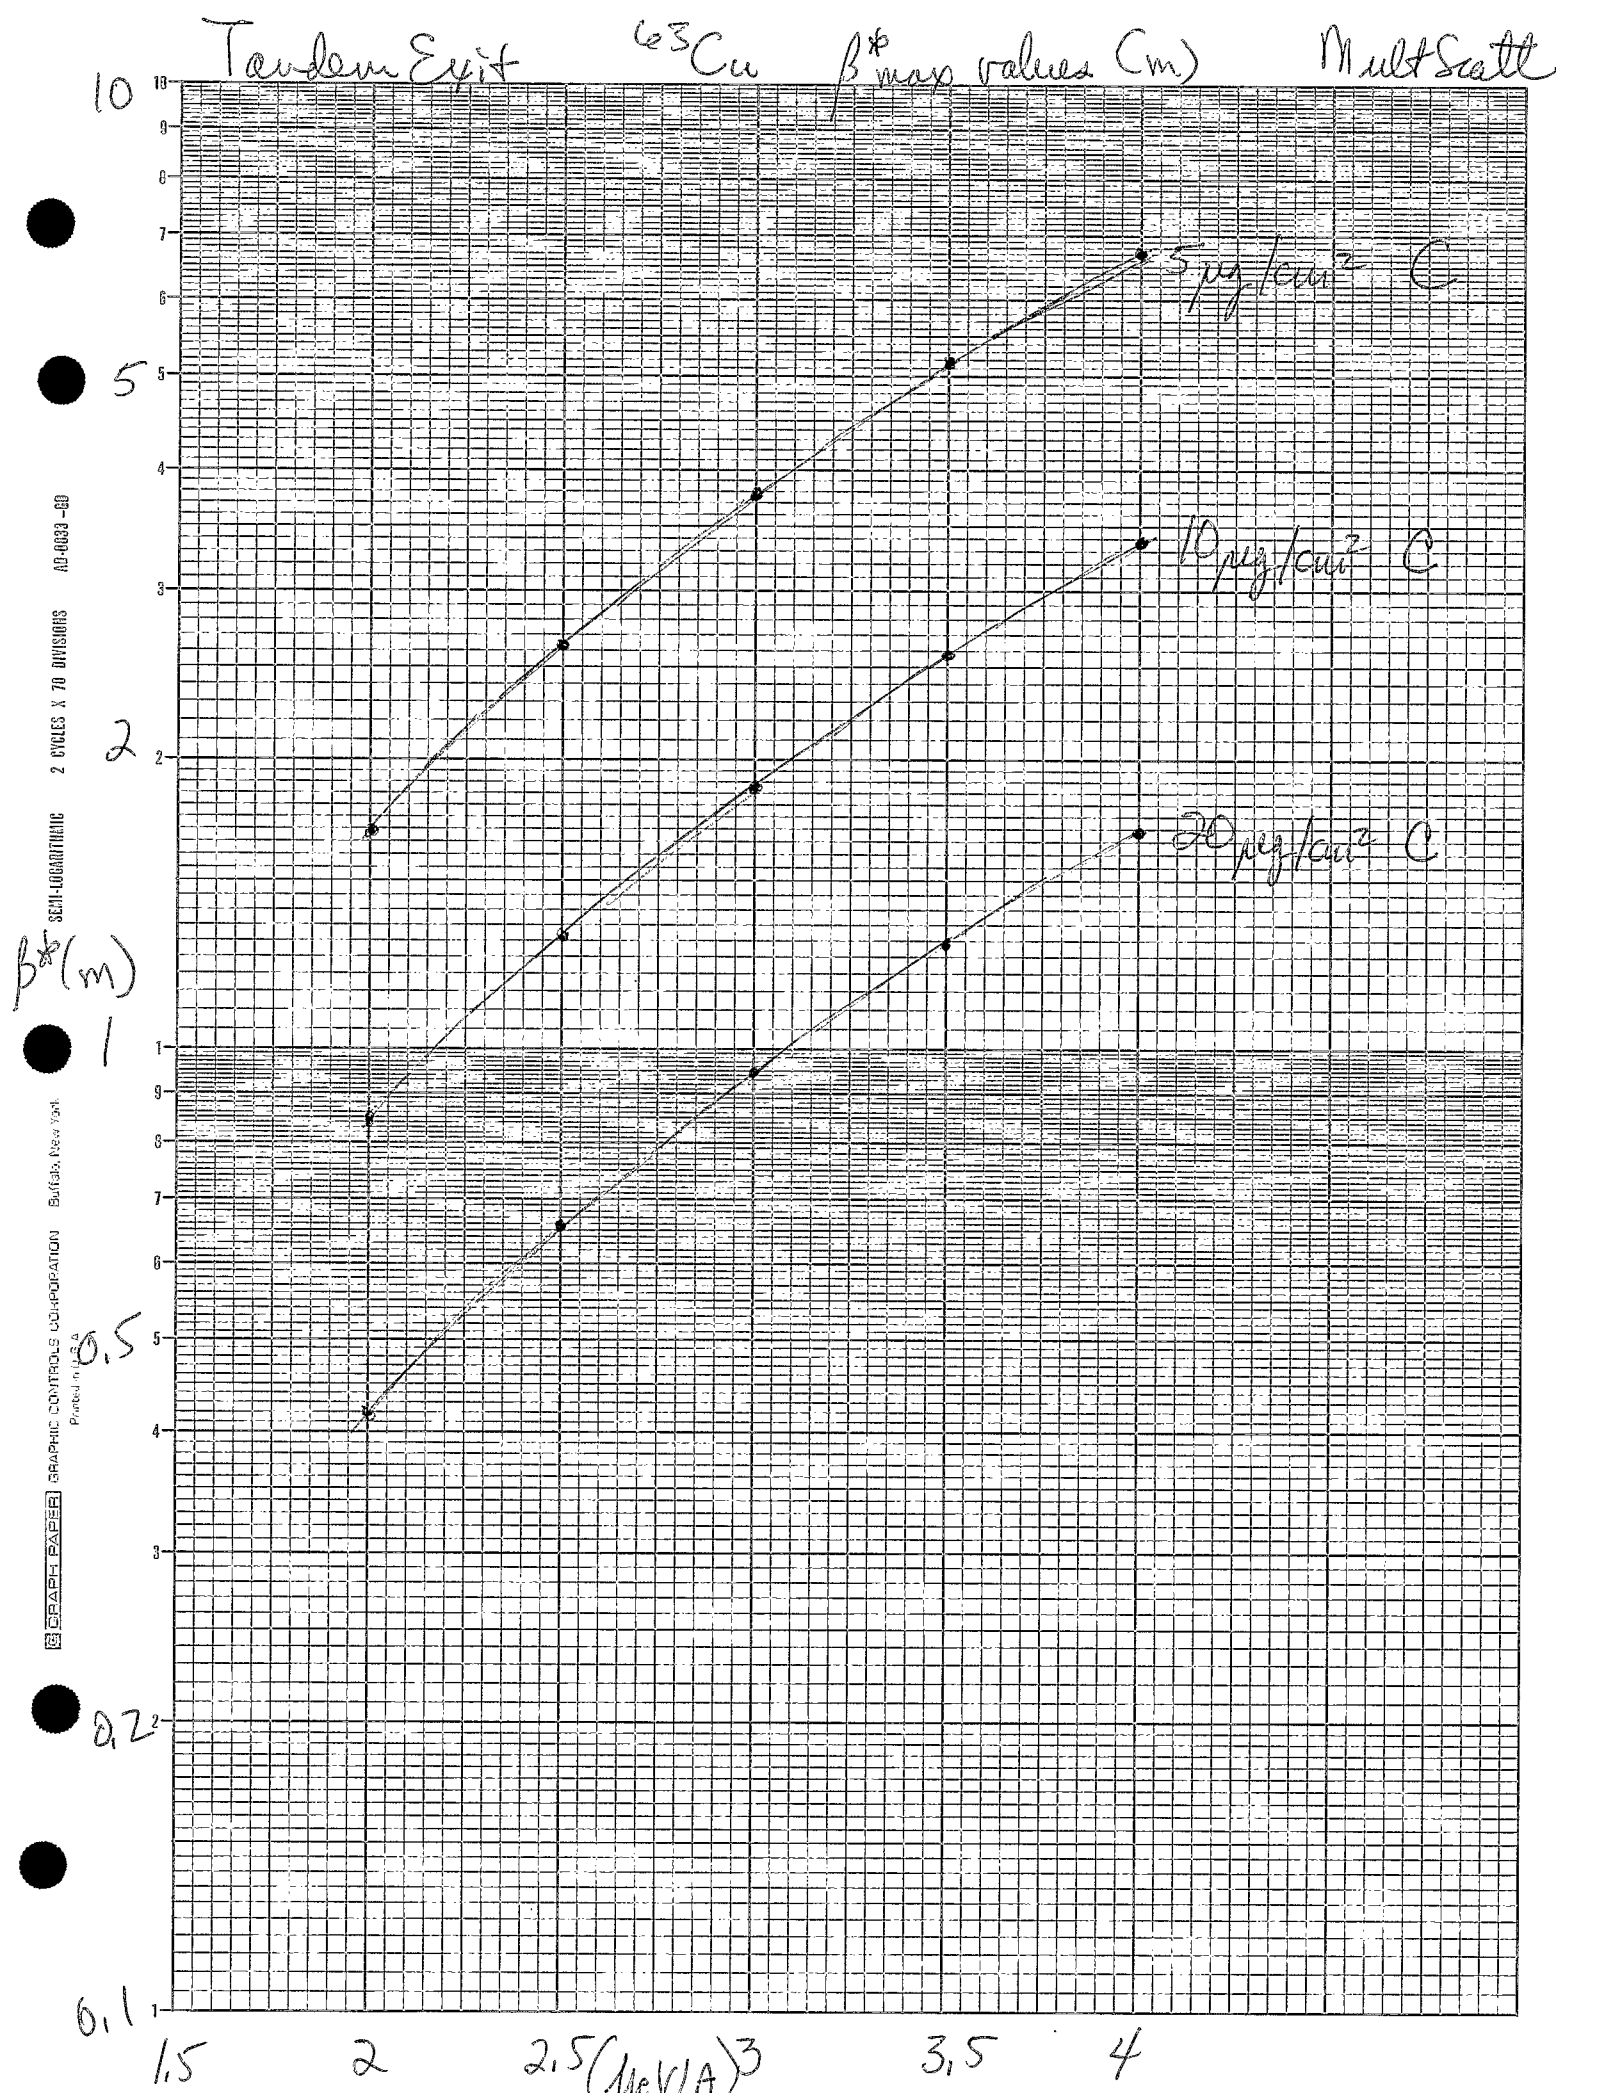
Tandem Exit
^{63}Cu β^* max values (m)
Mult Scatt
5 μg/cm² C
10 μg/cm² C
20 μg/cm² C
β^*(m)
10
5
2
1
0.5
0.2
0.1
1.5
2
2.5 (MeV/A)
3
3.5
4
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-0033-CD
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

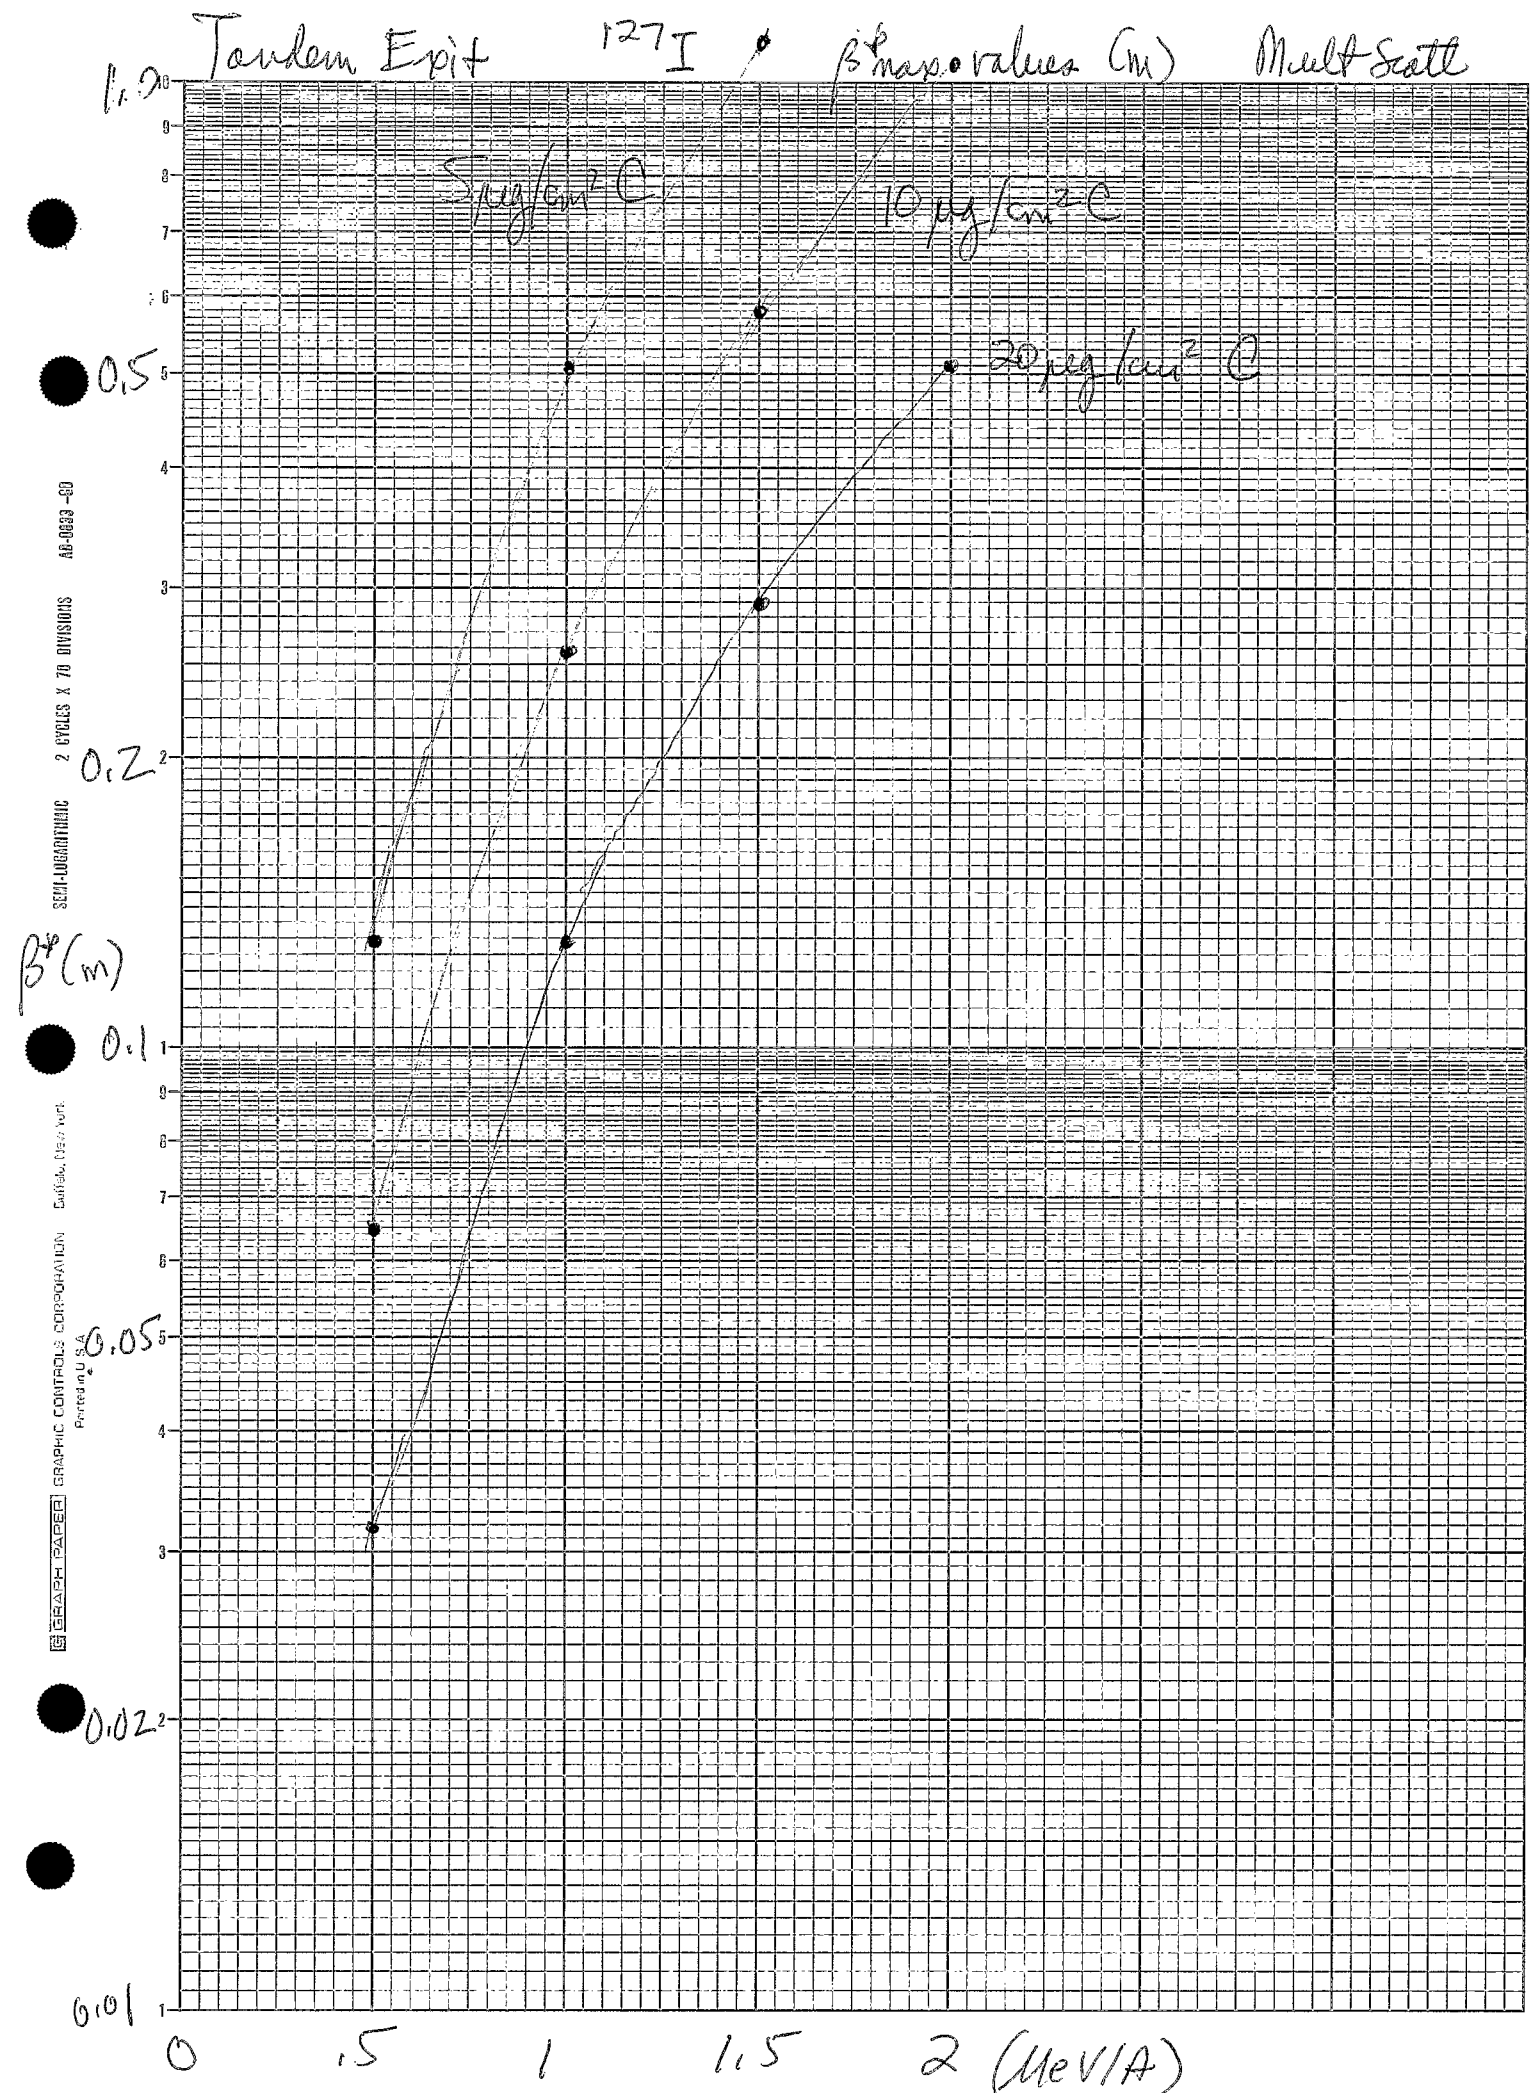
Tandem Exit 127I β* max. values (m) Mult Scatt
5 μg/cm² C
10 μg/cm² C
20 μg/cm² C
β*(m)
1.2
0.5
0.2
0.1
0.05
0.02
0.01
0
.5
1
1.5
2 (MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS A6-0693-80
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Printed in U.S.A.

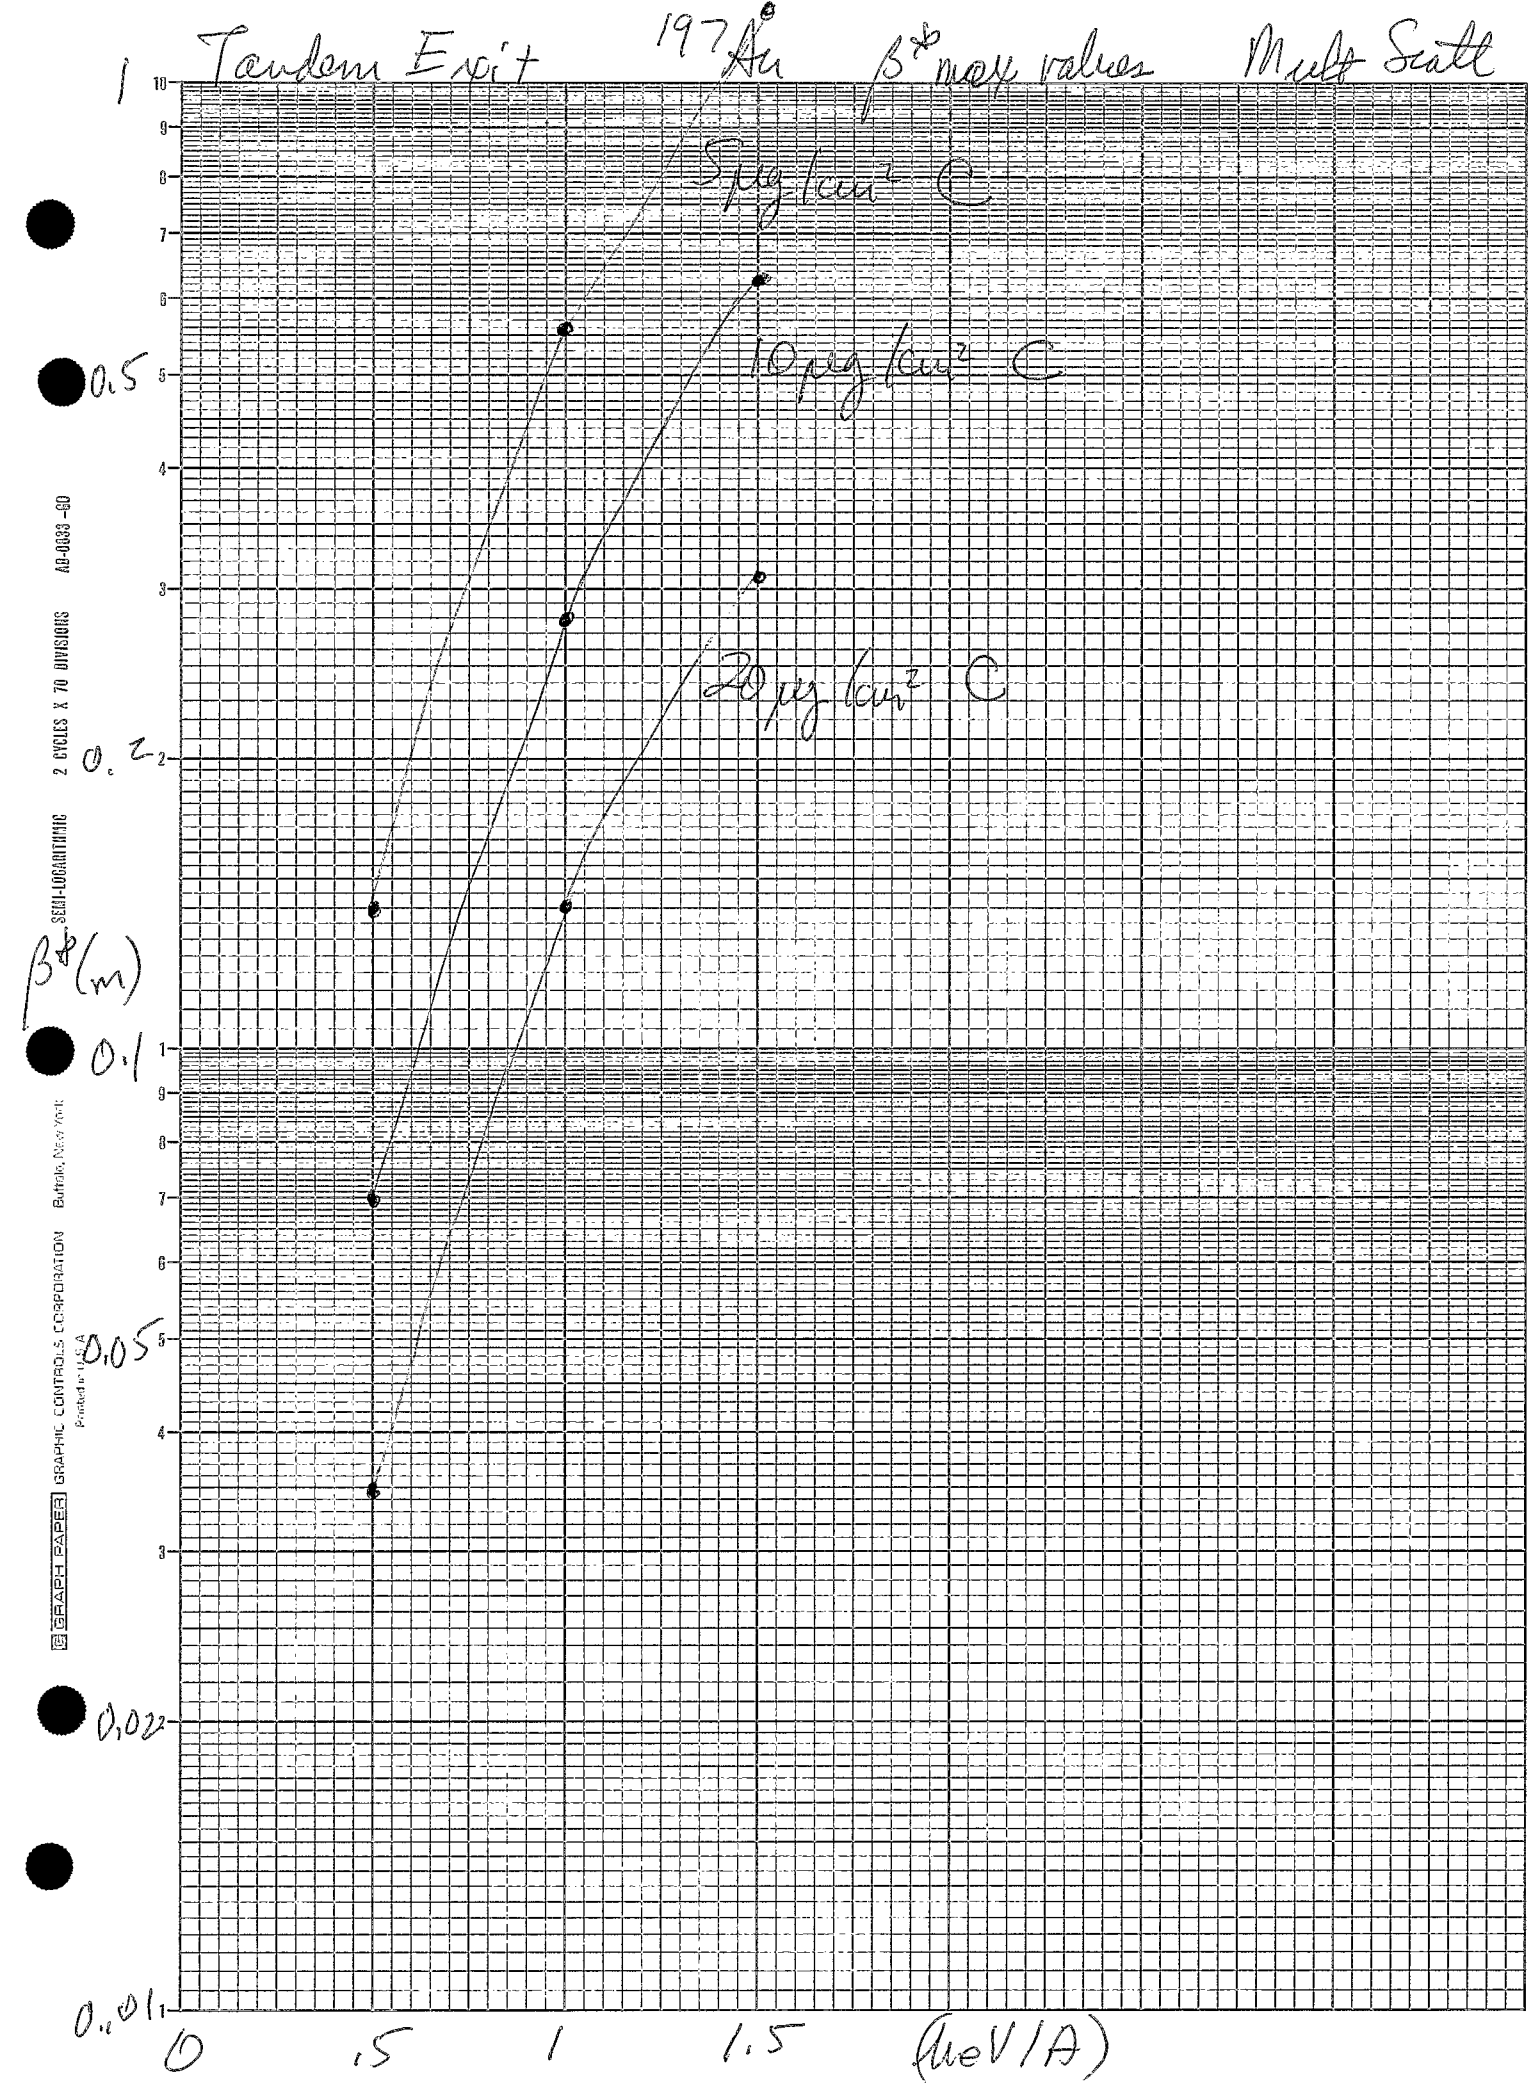
Tandem Exit
197 Au
β* max values
Mult Scatt
5 μg/cm² C
10 μg/cm² C
20 μg/cm² C
β*(m)
1
0.5
0.2
0.1
0.05
0.02
0.01
0
.5
1
1.5
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-0033-GD
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

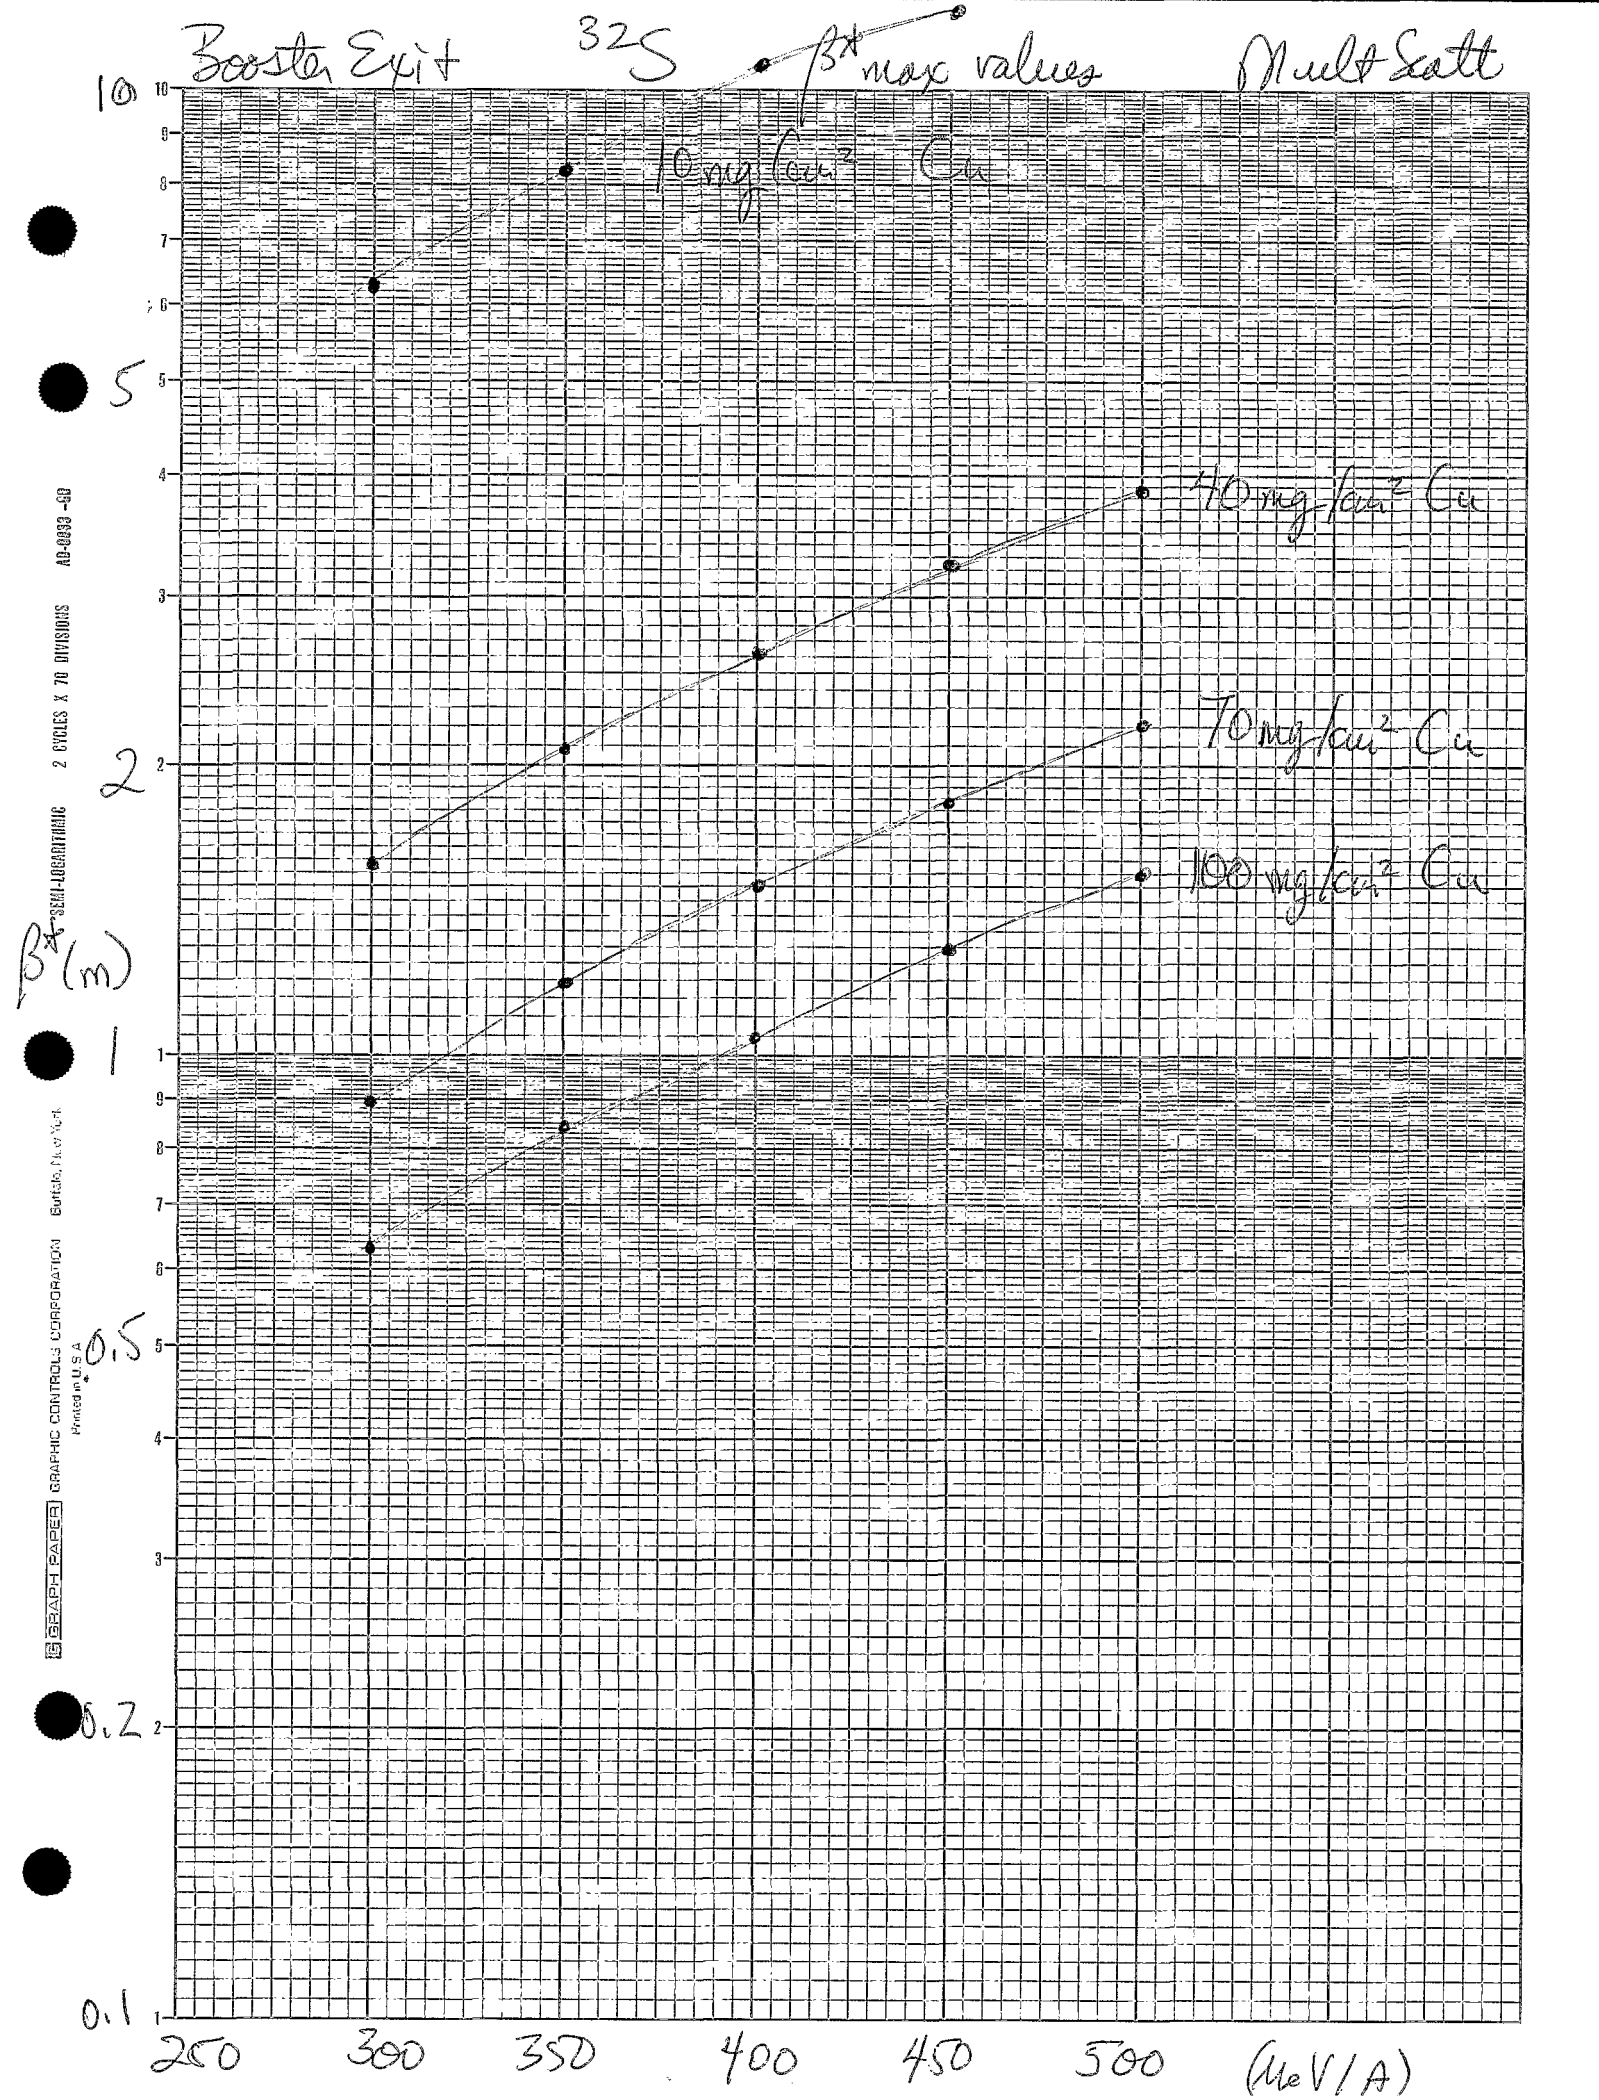
Booster Exit
325
β^* max values
Mult Scatt
10 mg/cm² Cu
40 mg/cm² Cu
70 mg/cm² Cu
100 mg/cm² Cu
β^* (m)
10
5
2
1
0.5
0.2
0.1
250
300
350
400
450
500
(MeV/A)
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, N.Y. U.S.A.
2 CYCLES X 70 DIVISIONS
AD-0893-GB

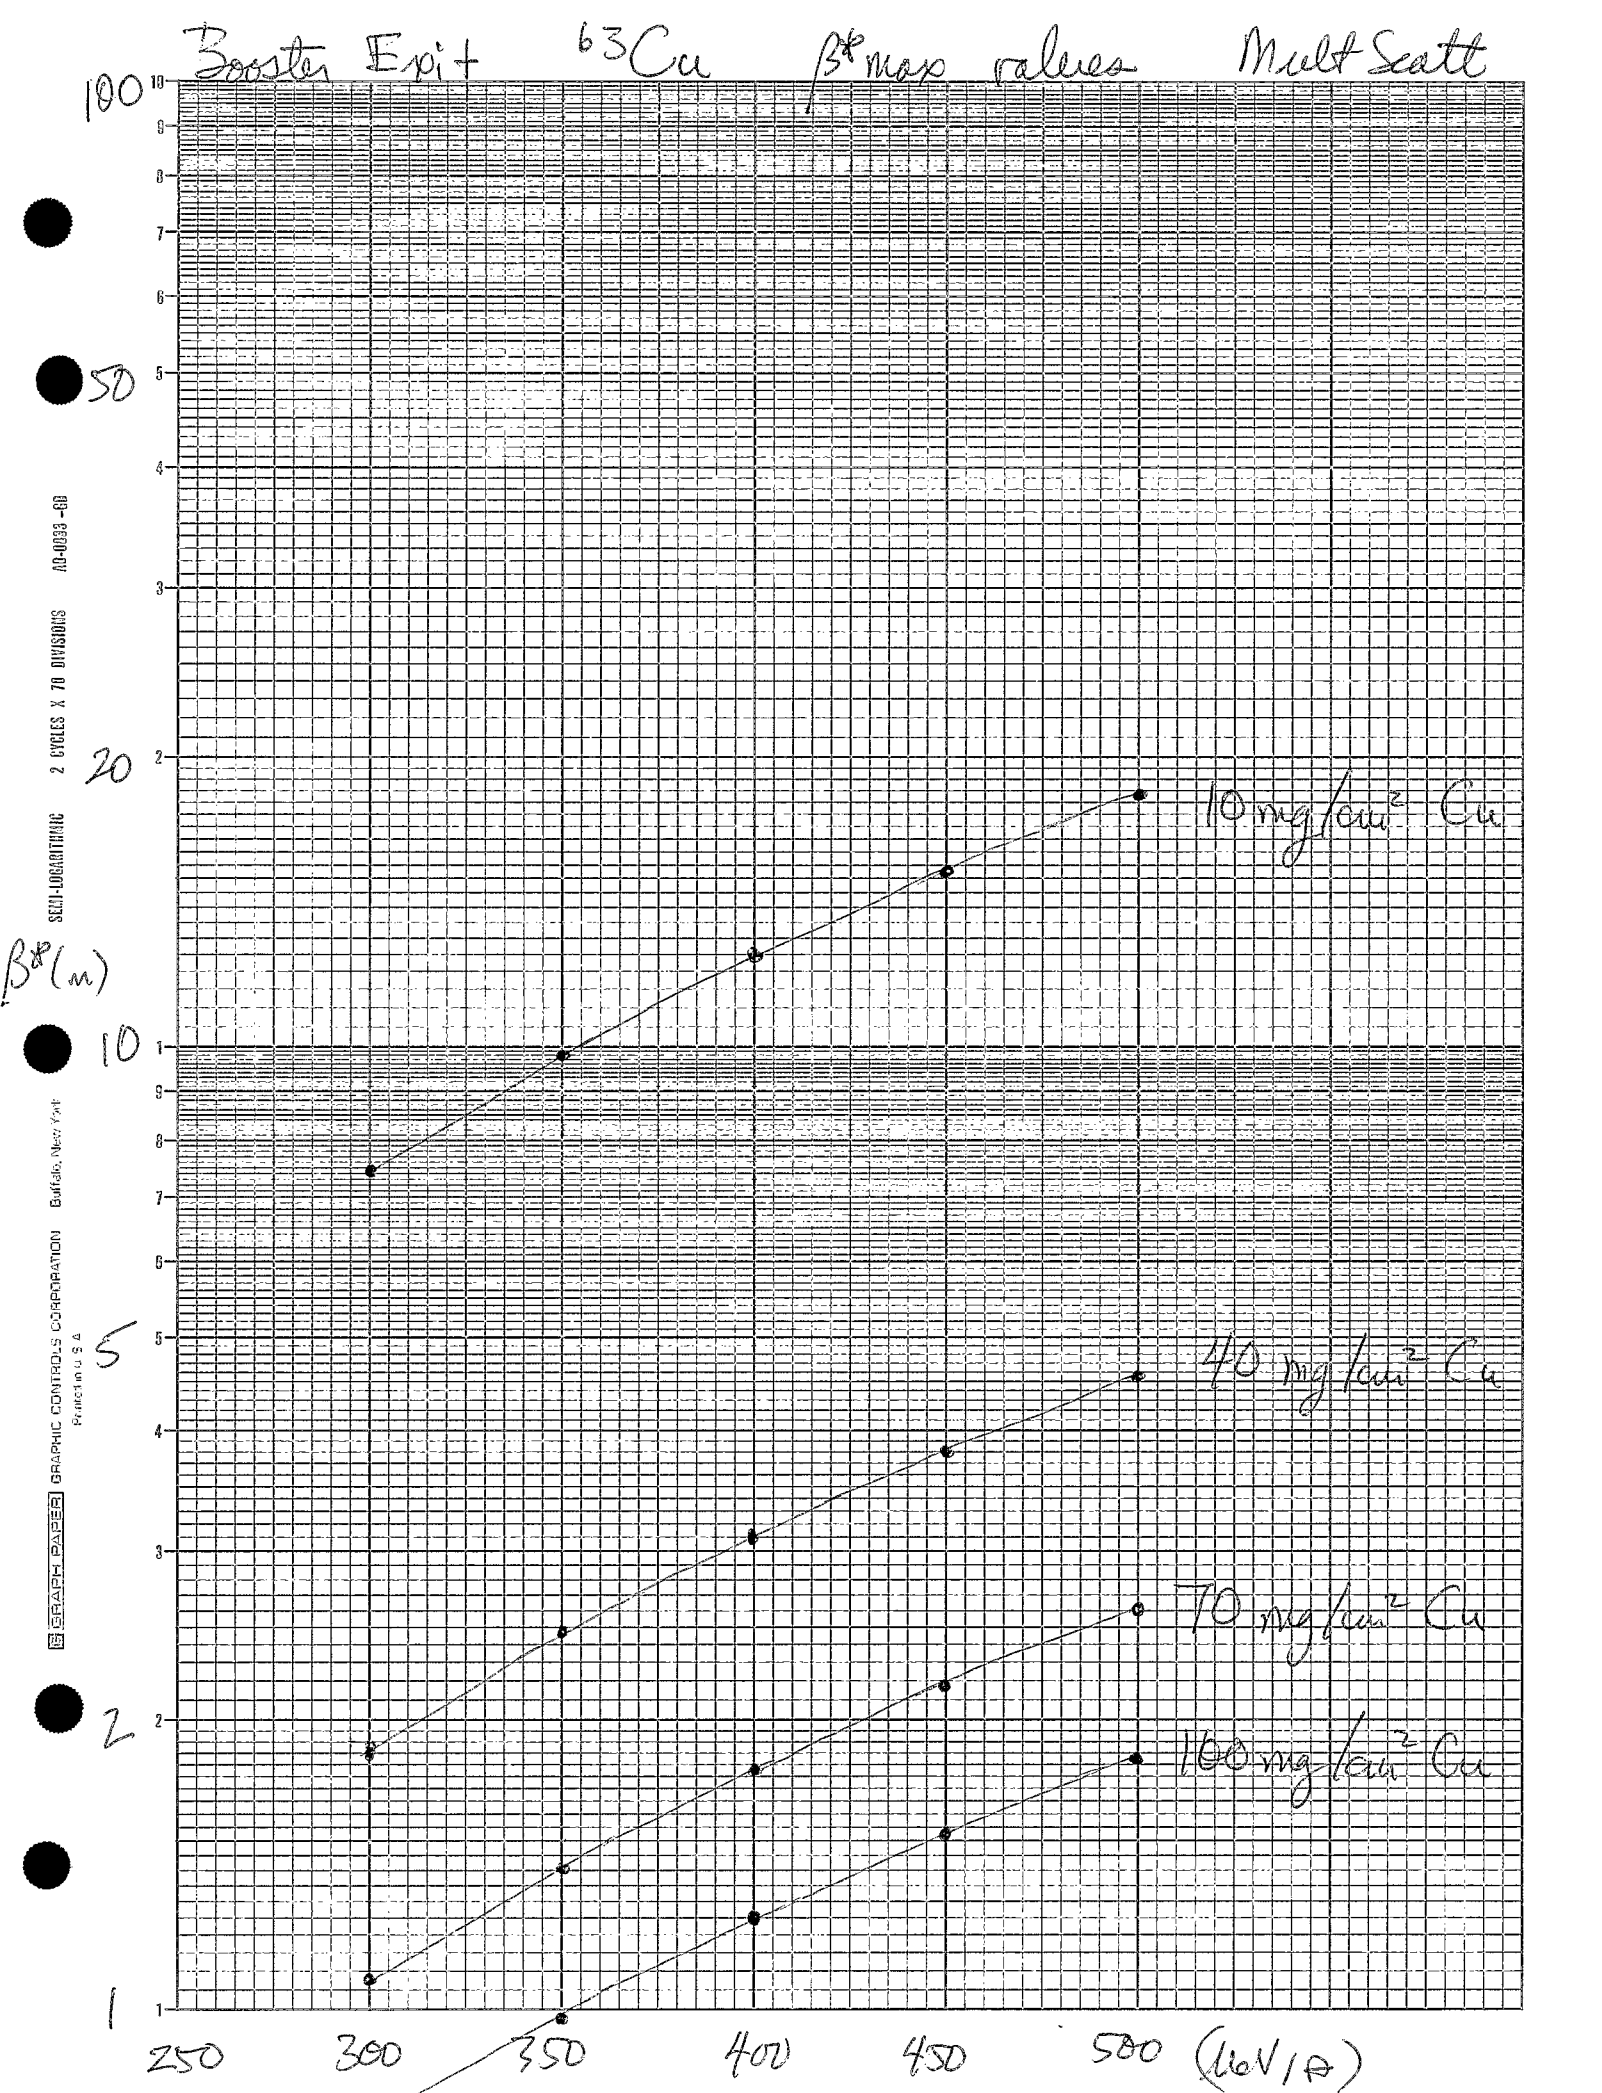
Booster Exit
63Cu
β* max values
Mult Scatt
β*(m)
100
50
20
10
5
2
1
10 mg/cm² Cu
40 mg/cm² Cu
70 mg/cm² Cu
100 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-0093-GB
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York Printed in U.S.A.

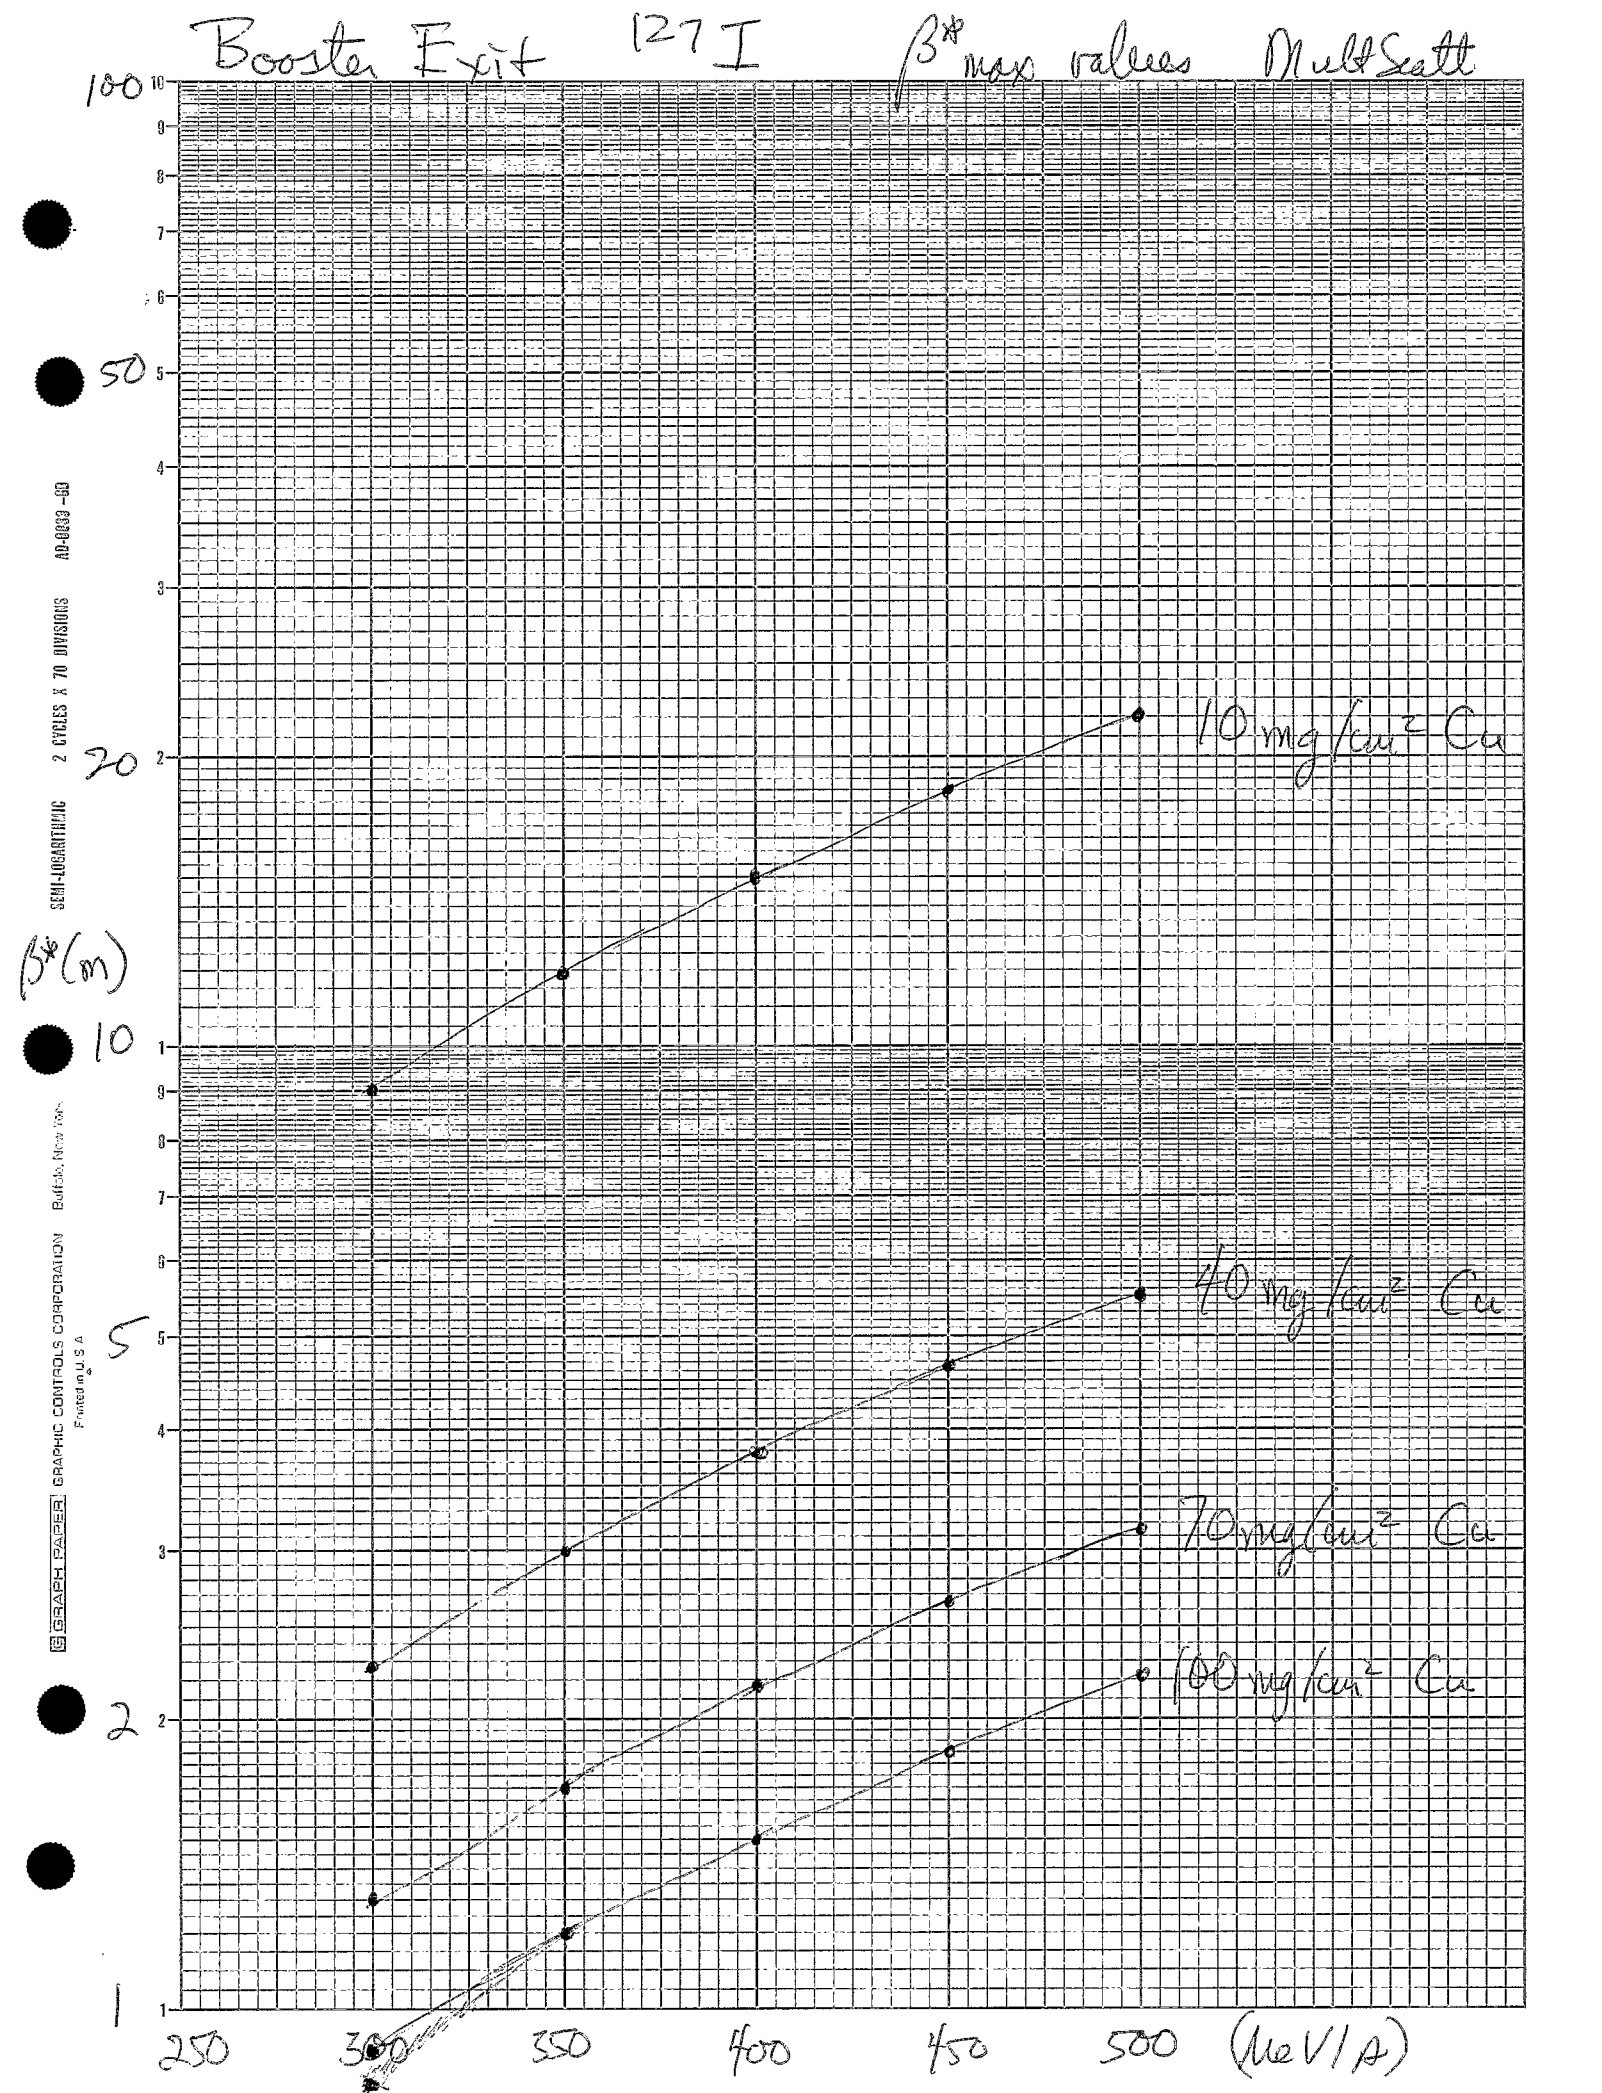
Booster Exit 127 I
β* max values Mult Scatt
β*(m)
10 mg/cm² Cu
40 mg/cm² Cu
70 mg/cm² Cu
100 mg/cm² Cu
250
300
350
400
450
500
(MeV/A)
100
50
20
10
5
2
1
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-0939-60
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York
Printed in U.S.A.

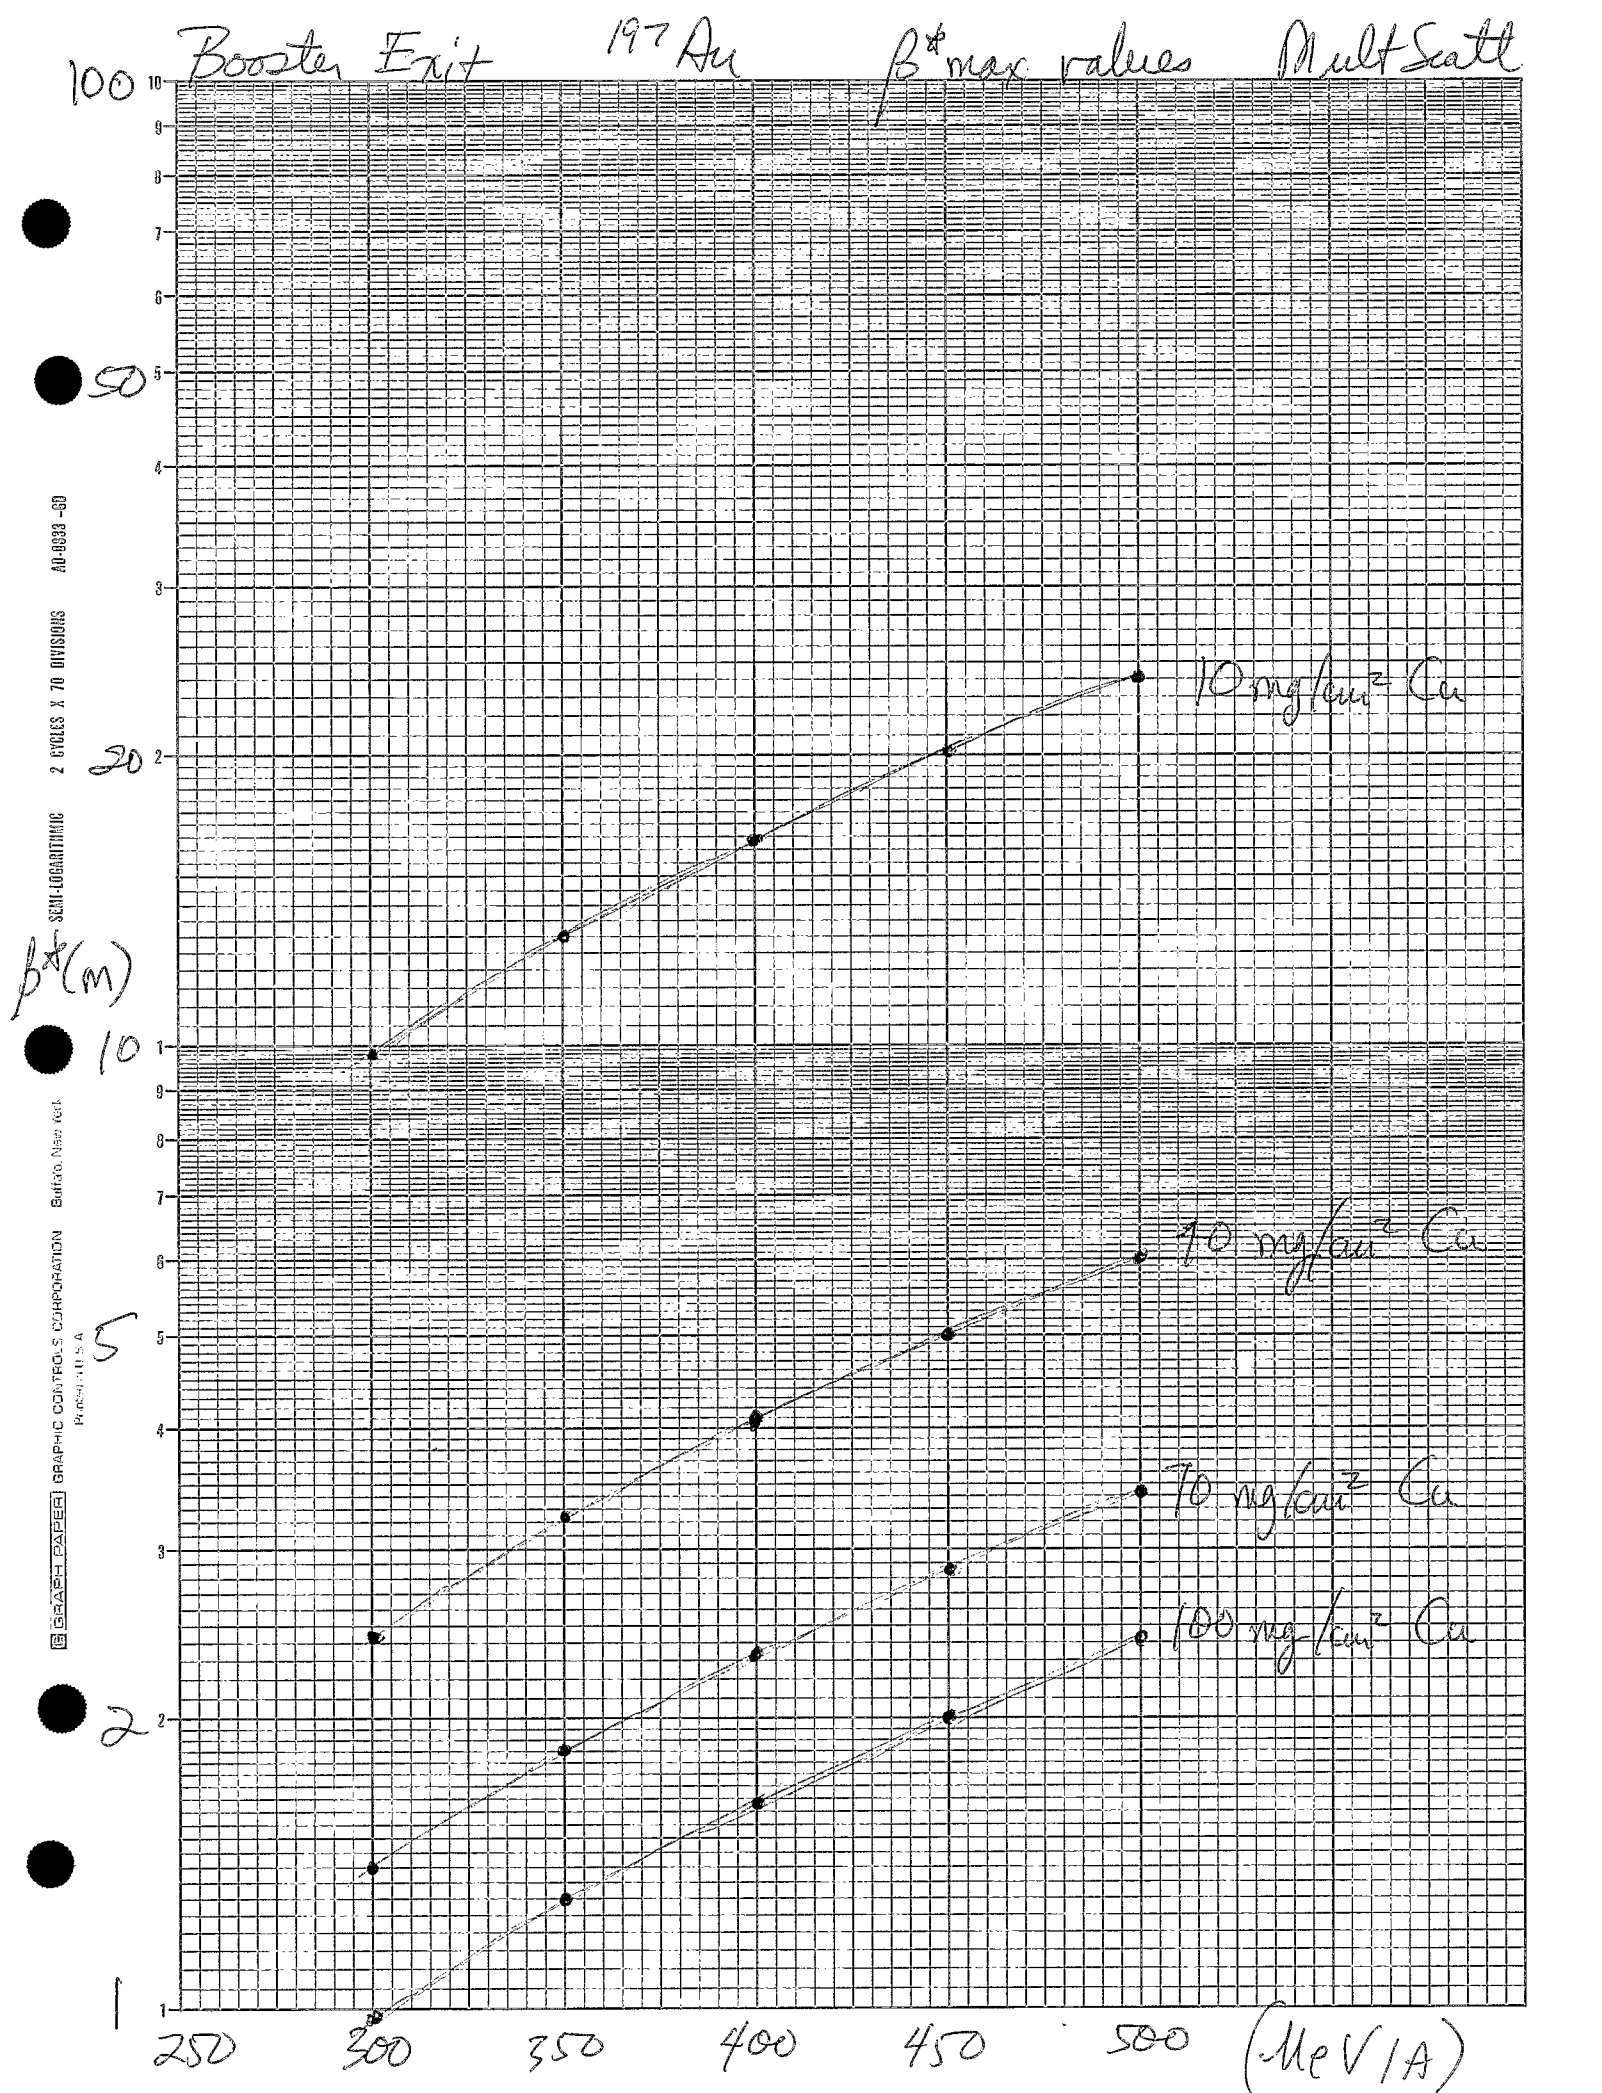
Booster Exit
197 Au
β* max values
Mult Scatt
10 mg/cm² Cu
70 mg/cm² Cu
70 mg/cm² Cu
100 mg/cm² Cu
β*(m)
100
50
20
10
5
2
1
250
300
350
400
450
500
(MeV/A)
SEMI-LOGARITHMIC 2 CYCLES X 70 DIVISIONS AD-9933-60
GRAPH PAPER GRAPHIC CONTROLS CORPORATION Buffalo, New York