

If you are using a printed copy of this procedure, and not the on-screen version, then you MUST make sure the dates at the bottom of the printed copy and the on-screen version match. The on-screen version of the Collider-Accelerator Department Procedure is the Official Version. Hard copies of all signed, official, C-A Operating Procedures are kept on file in the C-A ESHQ Training Office, Bldg. 911A.

C-A OPERATIONS PROCEDURES MANUAL

ATTACHMENT

4.56.at RHIC Zone 9z1 Sweep Checklist

Text Pages 2 through 3

C-A OPM Procedures in which this Attachment is used.		
4.56		

Hand Processed Changes

<u>HPC No.</u>	<u>Date</u>	<u>Page Nos.</u>	<u>Initials</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

Approved: _____ ***Signature on File*** _____
 Collider-Accelerator Department Chairman Date

P. Ingrassia, W. MacKay

RHIC Zone 9z1 Sweep Checklist

Team Leader (TL) _____ Sweeper#2 (S2) _____



Time: _____ Date: _____

Warning:

IF any workers are encountered during the sweep, **THEN** contact the OC to see if the sweep should be aborted. Workers shall leave the enclosure **WITH** the sweep team. **IF** the workers crash out of the enclosure **AND** do not exit with the sweep team, **THEN** the sweep shall be re-started.

Prerequisites

- Two persons to perform the sweep,
- At least one sweeper not restricted from working at heights over five feet.
- RHIC Zone 9z1 Sweep Checklist (two pages)
- Required Tools: at least one flashlight,
- Walkie-talkies
- All Doors closed THEN 9z1 set to Controlled Access
- Keys: Sweep Reset key S/R015, Controlled Access key CA014

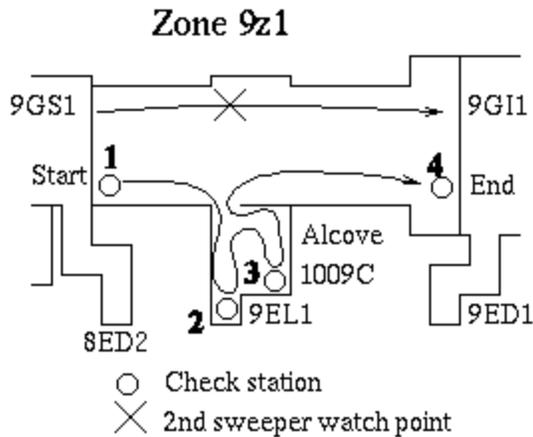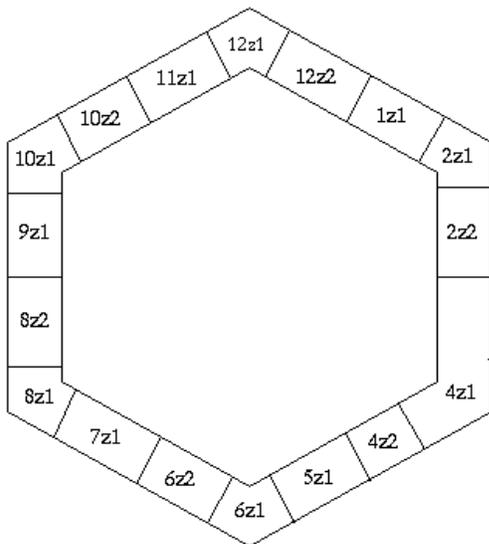

Note:

References to positions in the tunnel are made using the RHIC magnets. The identity of the local magnet can be determined by looking up at the “lower” cable tray and reading the magnet name on a blue (B) or yellow (Y) label. For example, the convention used is: I05Q17 (Inside, Q17) or O-05Q17 (Outside, Q17). References are for inside locations and are visible only by the TL

CONTINUED ON REVERSE SIDE

check

- ___ 1. Sweep team goes to gate 9GI1 TL requests simultaneous release from MCR.
- ___ 2. TL opens 9GI1 gate by turning the CA014 key clockwise, in the Controlled Access key-switch while Operator in MCR presses simultaneous release for 9GI1.
- ___ 3. Sweep Team walks to 9GS1 doors. (TL inside and Sweeper 2 outside).
- ___ 4. TL resets gate 9GS1 by turning the S/R015 key in the RESET keyswitch at 9GS1-I
- ___ 5. TL observes RESET lamp light
- ___ 6. TL STARTS SWEEP by turning the S/R015 key CW in the SWEEP key-switch on 9GS1-I (9CS1).
- ___ 7. TL observes AREA SECURED lamp blink once.
- ___ 8. Sweep team sweeps Clockwise (CW) around RHIC.
- ___ 9. TL stops to check the Exhaust Fan Vent Barrier at I9Q17D16.
- ___ 10. Sweep team sweeps Clockwise (CW) around RHIC.
- ___ 11. S2 stands static watch at the electrical services alcove opposite I09Q13.
- ___ 12. TL enters the alcove and goes to the ladder at 9EL1.
- ___ 13. IF there is no mirror to verify no one is on the landing at the top of the ladder, THEN TL must climb the ladder to verify no one is on the landing and to check that 9EL1 is closed.
- ___ 14. TL resets gate 9EL1 using the S/R015 key in the Reset keyswitch at the bottom of the ladder.
- ___ 15. IF 9EL1 will not reset THEN TL climbs the ladder, closes 9EL1, then repeats step 14.
- ___ 16. TL observes RESET lamp lights after RESET.
- ___ 17. TL sets second check station (9CS2) by turning S/R015 key in the SWEEP keyswitch.
- ___ 18. TL observes AREA SECURED lamp blink once.
- ___ 19. TL searches goes to the far corner of the alcove to 9CS3.
- ___ 20. TL sets third check station (9CS3) by turning S/R015 key in the SWEEP keyswitch.
- ___ 21. TL observes AREA SECURED lamp blink once.
- ___ 22. TL checks inside EVERY rack and then sweeps out the alcove and joins S2.
- ___ 23. TL checks fan vent barrier on vent above S2 and the barricade is in place on the ceiling above S2
- ___ 24. Sweep team sweeps Clockwise (CW) around RHIC.
- ___ 25. At I09DU7 S2 shines flashlight into port on outside wall of tunnel to verify no one is inside.
- ___ 26. Sweep team sweeps Clockwise (CW) around RHIC.
- ___ 27. Sweep Team stops to check the Exhaust Fan Vent Barriers at I9Q7D6.
- ___ 28. Sweep team sweeps Clockwise (CW) around RHIC.
- ___ 29. Sweep Team stops to check the Electrical Alcoves and overhead barricade at I09D5
- ___ 30. S2 checks fan vent barriers (2 each) on tunnel wall upstream of dump kicker magnets
- ___ 31. Sweep Team sweeps past dump kicker magnets and PFNs making sure no one is between the PFNs.
- ___ 32. Sweep Team sweeps to gate 9GI1.
- ___ 33. TL ENDS SWEEP by turning the S/R015 key SWEEP key on 9GI1-I (9CS4).
- ___ 34. TL observes the yellow AREA SECURED lamp is lighted
- ___ 35. TL contacts MCR for simultaneous release for gate 9GI1.
- ___ 36. Sweep Team sweeps out 9z1 through their respective 9GI1 doors.
- ___ 37. TL resets gate 9GI1 using the S/R015 key in the Reset keyswitch at 9GI1 on 10z1 side
- ___ 38. TL observes the yellow RESET lamp is lighted
- ___ 39. TL contacts MCR and confirms that gates are reset and 9z1 zone indicates sweep is good.

Note:

IF the AREA RESET, and GATE SECURED lamps are not lit THEN contact MCR to verify sweep is good and gates are reset.

- ___ 40. After returning to MCR and verifying that all information is filled out completely, TL files the checklist in FY_xx Sweep Log binder.